



PROTECTED BY

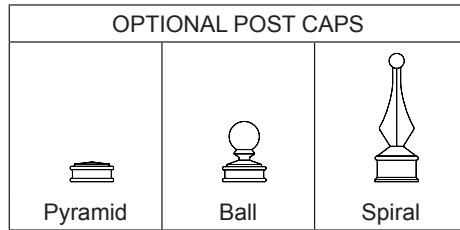

ARMOUR-SHIELD™



SPECIFICATIONS

TUBE COMPOSITION - POSTS, RAILS & PICKETS

ZAM™ Coated Cold Formed ERW Tubing

- With a coating designation **ZM 275** being a minimum protective coating weight of 275gm/m² both interior and exterior
- Top coat consisting of a chromium-free phosphate conversion coating
- Coating conforming to ASTM A1046 for hot dip coatings comprising of Zinc, Aluminum and Magnesium
- ERW tube conforming to ASTM A787 Type 6
- Minimum Yield Strength 207 MPa and Minimum Tensile Strength 290 MPa
- Weld seams mill re-metalized

MATERIAL DIMENSIONS

PICKETS	5/8" × 5/8" (16mm × 16mm) 18 GA
RAILS	1-1/4" × 1-1/4" (32mm × 32mm) 16 GA
POSTS	2" × 2" (51mm × 51mm) 14 GA
OPTIONAL POSTS(1)	2" × 2" (51mm × 51mm) 11 GA
OPTIONAL POSTS(2)	2-1/2" × 2-1/2" (64mm × 64mm) 14 GA

WELDS Stainless Steel Mig Weld

FITTINGS 14 Gauge Stamp Forged Finish as below

FITTING FASTENERS JS1000 Plated Finish as below


OPTIONAL FASTENER Tamper Proof Nuts

FINISH

GRADE	Super Durable Polyester Powder Coat
OPTIONAL PRIMER	Zinc Rich Epoxy Powder Coat
STANDARD COLOUR	Gloss Black
OTHER COLOURS	Green, Brown, White, Antique Silver
CUSTOM COLOURS	Per Specifications

STANDARD HEIGHTS	48" 1219mm	60" 1524mm	72" 1892mm
-------------------------	---------------	---------------	---------------

STANDARD GATES Passage, Double Entry, Canatilever

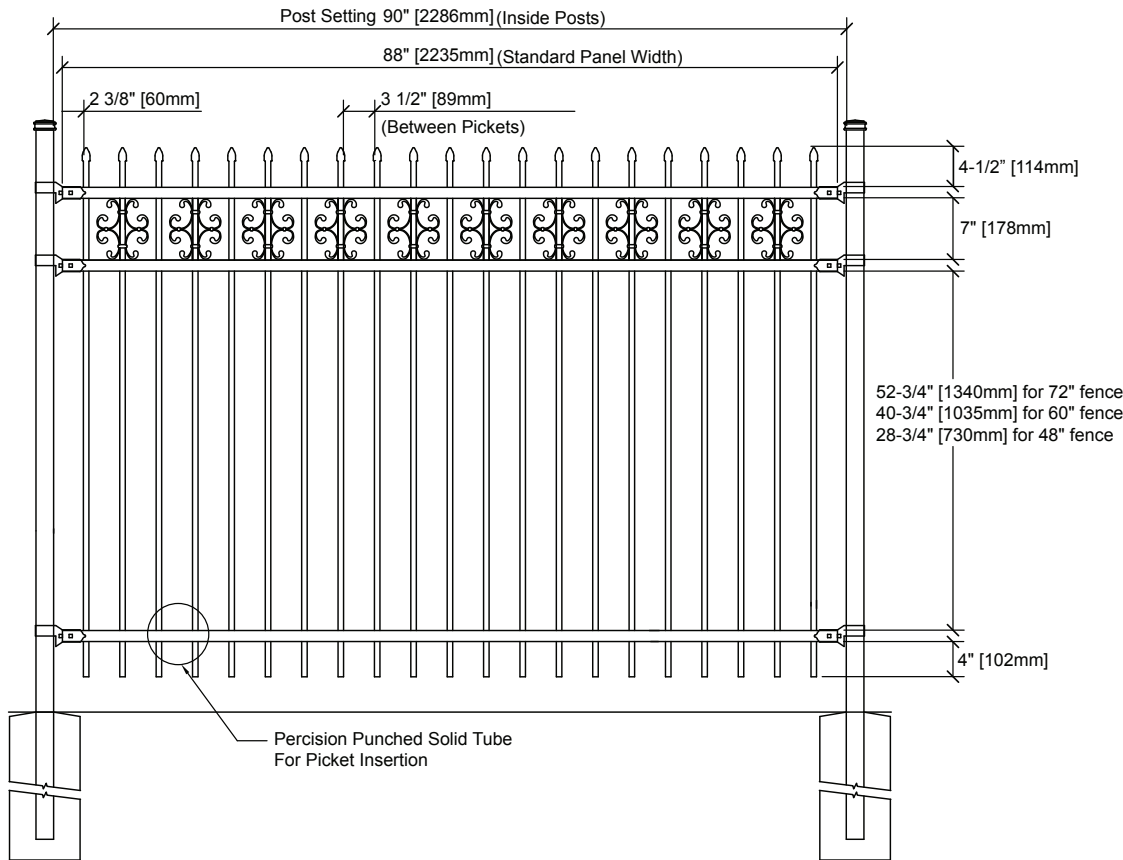

MEDALLION FENCE LTD
 10651 KEELE STREET
 MAPLE, ONTARIO L6A 3Y9
 (T) 905-832-2922 || 1-800-794-1564 || (F) 905-832-1564
 info@medallionfence.com || www.medallionfence.com

MATERIAL SPECIFICATIONS:
ARMOUR-SHIELD™ BY MEDALLION FENCE

STYLE:
ARISTOCRAT DSEO

SERIES:
4000
 DATE: MM/DD/YYYY
1/15/2016