

PROTECTED BY



ARMOUR-SHIELD™

**SPECIFICATIONS**

**TUBE COMPOSITION - POSTS, RAILS & PICKETS**

- ZAM™ Coated Cold Formed ERW Tubing**
- With a coating designation **ZM 275** being a minimum protective coating weight of 275gm/m<sup>2</sup> both interior and exterior
  - Top coat consisting of a chromium-free phosphate conversion coating
  - Coating conforming to ASTM A1046 for hot dip coatings comprising of Zinc, Aluminum and Magnesium
  - ERW tube conforming to ASTM A787 Type 6
  - Minimum Yield Strength 207 MPa and Minimum Tensile Strength 290 MPa
  - Weld seams mill re-metalized

**MATERIAL DIMENSIONS**

<b>PICKETS</b>	5/8" × 5/8" (16mm × 16mm) 18 GA
<b>RAILS</b>	1-1/4" × 1-1/4" (32mm × 32mm) 16 GA
<b>POSTS</b>	2" × 2" (51mm × 51mm) 14 GA
<b>OPTIONAL POSTS(1)</b>	2" × 2" (51mm × 51mm) 11 GA
<b>OPTIONAL POSTS(2)</b>	2-1/2" × 2-1/2" (64mm × 64mm) 14 GA




<b>WELDS</b>	Stainless Steel Mig Weld
--------------	--------------------------

<b>FITTINGS</b>	14 Gauge Stamp Forged Finish as below
<b>FITTING FASTENERS</b>	JS1000 Plated Finish as below
<b>OPTIONAL FASTENER</b>	Tamper Proof Nuts

<b>FINISH</b>	
<b>GRADE</b>	Super Durable Polyester Powder Coat
<b>OPTIONAL PRIMER</b>	Zinc Rich Epoxy Powder Coat
<b>STANDARD COLOUR</b>	Gloss Black
<b>OTHER COLOURS</b>	Green, Brown, White, Antique Silver
<b>CUSTOM COLOURS</b>	Per Specifications

<b>STANDARD HEIGHTS</b>	51" [1295mm]	63" 1600mm	75" 1905mm
-------------------------	-----------------	---------------	---------------

<b>STANDARD GATES</b>	Passage, Double Entry, Canatilever
-----------------------	------------------------------------

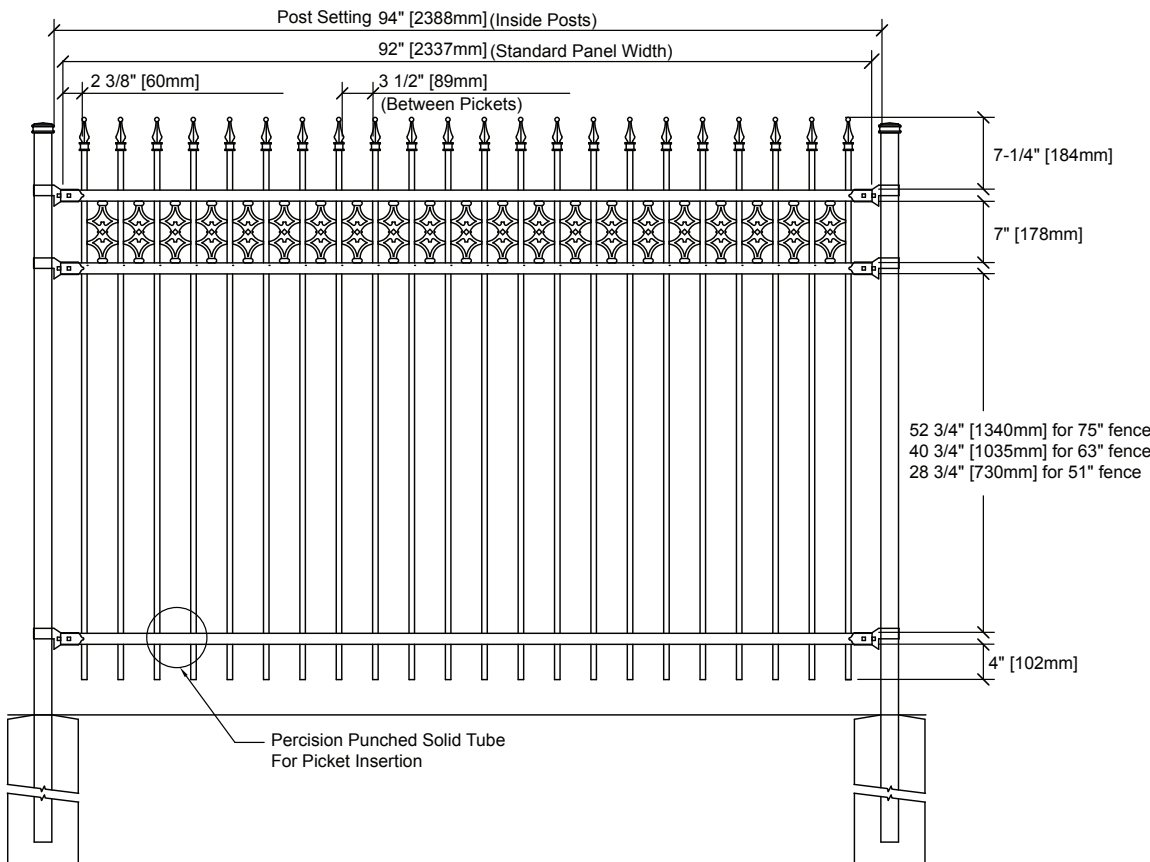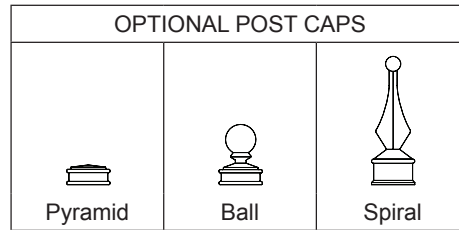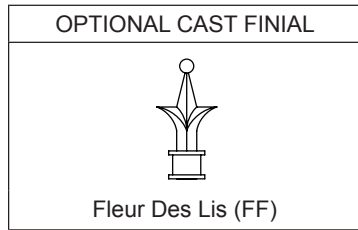

**MEDALLION FENCE LTD**  
 10651 KEELE STREET  
 MAPLE, ONTARIO L6A 3Y9  
 (T) 905-832-2922 || 1-800-794-1564 || (F) 905-832-1564  
 info@medallionfence.com || www.medallionfence.com

MATERIAL SPECIFICATIONS:  
**ARMOUR-SHIELD™ BY MEDALLION FENCE**

STYLE:  
**CAVALIER SF-DDEP**

SERIES:  
**4000**

DATE: MM/DD/YYYY  
**1/15/2016**