

PROTECTED BY



ARMOUR-SHIELD™

SPECIFICATIONS

TUBE COMPOSITION - POSTS, RAILS & PICKETS

- ALLIED FLO-COAT®** Triple Coated Cold Form Tubing
- Cold Formed and Quenched for High Yield and Tensile Strength
 - Interior Coating Including Weld Seam with 90% Organic Zinc
 - Exterior Coating Including Weld Seam with 99% Pure Zinc
 - Passivation of Tube with a Chromate Conversion Coating
 - Protective Sealer / Primer with Clear Organic Polymer

MATERIAL DIMENSIONS

PICKETS	5/8" × 5/8" (16mm × 16mm) 18 GA
RAILS	1-1/4" × 1-1/4" (32mm × 32mm) 16 GA
POSTS	2" × 2" (51mm × 51mm) 14 GA
OPTIONAL POSTS(1)	2" × 2" (51mm × 51mm) 11 GA
OPTIONAL POSTS(2)	2-1/2" × 2-1/2" (64mm × 64mm) 14 GA



WELDS	Stainless Steel Mig Weld
--------------	--------------------------

FITTINGS	14 Gauge Stamp Forged Finish as below
FITTING FASTENERS	JS1000 Plated Finish as below
OPTIONAL FASTENER	Tamper Proof Nuts

FINISH	
GRADE	Super Durable Polyester Powder Coat
OPTIONAL PRIMER	Zinc Rich Epoxy Powder Coat
STANDARD COLOUR	Gloss Black
OTHER COLOURS	Green, Brown, White, Antique Silver
CUSTOM COLOURS	Per Specifications

STANDARD HEIGHTS	36"	42"	48"	60"	72"
	914mm	1067mm	1219mm	1524mm	1892mm

STANDARD GATES	Passage, Double Entry, Canatilever
-----------------------	------------------------------------

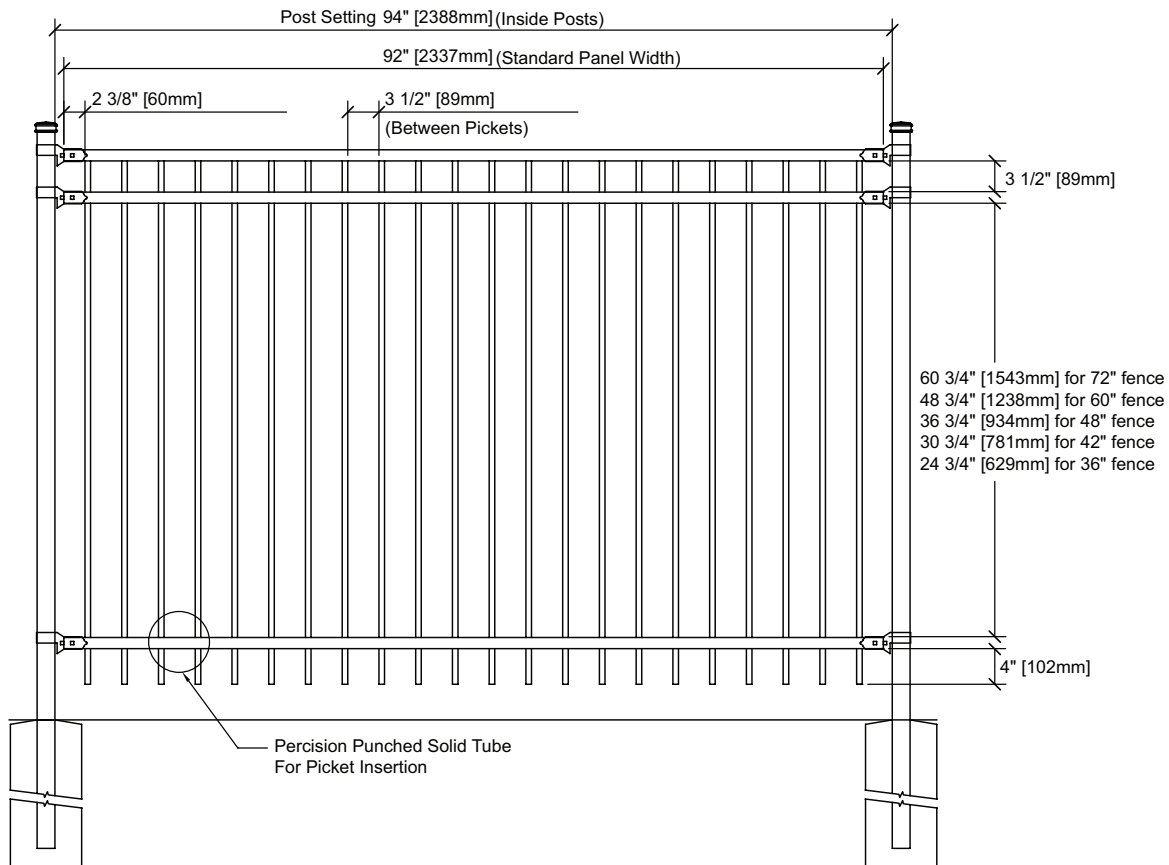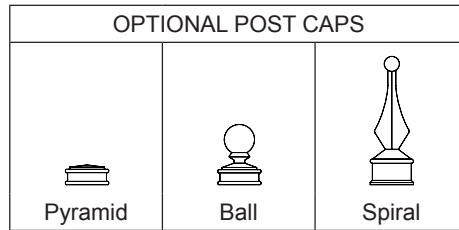

MEDALLION FENCE LTD

10651 KEELE STREET
 MAPLE, ONTARIO L6A 3Y9

(T) 905-832-2922 || 1-800-794-1564 || (F) 905-832-1564
 info@medallionfence.com || www.medallionfence.com

MATERIAL SPECIFICATIONS:

ARMOUR-SHIELD™ BY MEDALLION FENCE

STYLE:

STANTON - 4450

SERIES:

4000

DATE: MM/DD/YYYY

06/01/2012