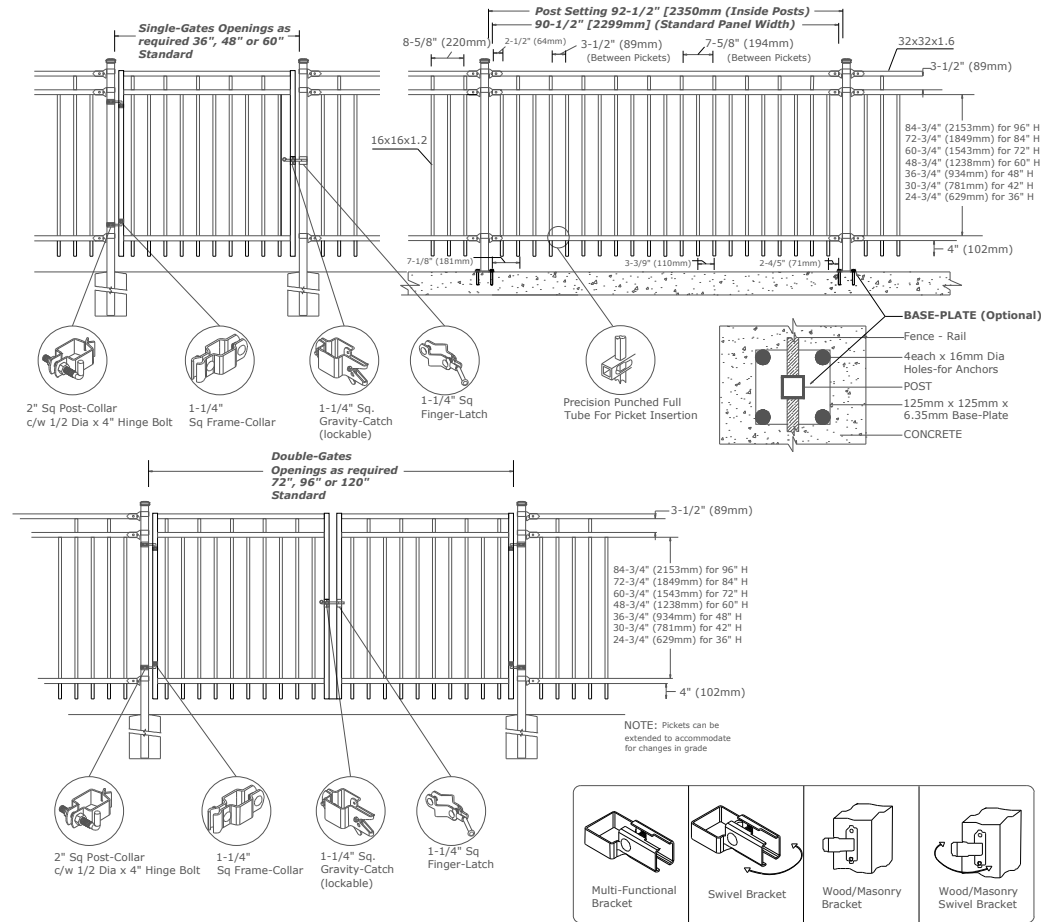# Medallion Fence

10651 KEELE STREET
MAPLE, ONTARIO L6A 3Y9
(T) 905-832-2922 || 1-800-794-1564 || (F) 905-832-1564
info@medallionfence.com || www.medallionfence.com

Style: ALDEN

Series: WELLINGTON™

Fence Diagrams

Single-Gates Openings as required 36", 48" or 60" Standard

Post Setting 92-1/2" [2350mm (Inside Posts)]
90-1/2" [2299mm] (Standard Panel Width)

8-5/8" (220mm) 2-1/2" (64mm) 3-1/2" (89mm) (Between Pickets) 7-5/8" (194mm) (Between Pickets) 32x32x1.6

3-1/2" (89mm)

16x16x1.2

84-3/4" (2153mm) for 96" H
72-3/4" (1849mm) for 84" H
60-3/4" (1543mm) for 72" H
48-3/4" (1238mm) for 60" H
36-3/4" (934mm) for 48" H
30-3/4" (781mm) for 42" H
24-3/4" (629mm) for 36" H

4" (102mm)

7-1/8" (181mm)   3-3/9" (110mm)   2-4/5" (71mm)

2" Sq Post-Collar c/w 1/2 Dia x 4" Hinge Bolt

1-1/4" Sq Frame-Collar

1-1/4" Sq. Gravity-Catch (lockable)

1-1/4" Sq Finger-Latch

Precision Punched Full Tube For Picket Insertion

BASE-PLATE (Optional)
Fence - Rail
4each x 16mm Dia Holes-for Anchors
POST
125mm x 125mm x 6.35mm Base-Plate
CONCRETE

Double-Gates Openings as required 72", 96" or 120" Standard

3-1/2" (89mm)

84-3/4" (2153mm) for 96" H
72-3/4" (1849mm) for 84" H
60-3/4" (1543mm) for 72" H
48-3/4" (1238mm) for 60" H
36-3/4" (934mm) for 48" H
30-3/4" (781mm) for 42" H
24-3/4" (629mm) for 36" H

4" (102mm)

NOTE: Pickets can be extended to accommodate for changes in grade

2" Sq Post-Collar c/w 1/2 Dia x 4" Hinge Bolt

1-1/4" Sq Frame-Collar

1-1/4" Sq. Gravity-Catch (lockable)

1-1/4" Sq Finger-Latch

Multi-Functional Bracket | Swivel Bracket | Wood/Masonry Bracket | Wood/Masonry Swivel Bracket

MATERIAL SPECIFICATIONS:

ARMOUR-SHIELD™ BY MEDALLION FENCE

PROTECTED BY

ARMOUR-SHIELD

OPTIONAL POST CAPS

PYRAMID | BALL | SPIRAL

SPECIFICATIONS

TUBE COMPOSITION - POSTS , RAILS & PICKETS

Triple Coated Cold Form Tubing

○ Cold Formed and Quenched for High Yield and Tensile Strength
○ Interior Coating Including Weld Seam with 90% Organic Zinc
○ Exterior Coating Including Weld Seam with 99% Pure Zinc
○ Passivation of Tube with a Chromate Conversion Coating
○ Protective Sealer / Primer with Clear Organic Polymer

MATERIAL DIMENSIONS

PICKET	**3/4" x 3/4" (19mm x 19mm)** 18 GA
RAILS	**1-1/4" x 1-1/4" (32mm x 32mm)** 16 GA
POSTS	**2" x 2" (51mm x 51mm)** 14 GA
OPTIONAL POST(1) REGULAR or BASE-PLATED	**2" x 2" (51mm x 51mm)** 11 GA
OPTIONAL POST(2) REGULAR or BASE-PLATED	**2-1/2" x 2-1/2" (64mmx64mm)** 14 GA

WELDS	Stainless Steel Mig Weld
FITTINGS	14 Gauge Stamp Forged Finish as below
FITTING FASTENERS	JS1000 Plated Finish as below
OPTIONAL FASTENER	Tamper Proof Nuts

FINISH

GRADE	Super Durable Polyester Powder Coat
OPTIONAL PRIMER	Zinc Rich Epoxy Powder Coat
STANDARD COLOUR	SEMI-GLOSS - BLACK
OTHER COLOURS	Green, Brown, White, Antique Silver
CUSTOM COLOURS	Per Specifications

STANDARD HEIGHT	36" 914mm	42" 1067mm	48" 1219mm	60" 1524mm	72" 1892mm	84" 2134mm	96" 2438mm
	Custom heights are available (upon request)						

STANDARD GATES	Passage, Double Entry, Cantilever