



Medallion Fence


10651 KEELE STREET
MAPLE, ONTARIO L6A 3Y9
(T) 905-832-2922 || 1-800-794-1564 || (F) 905-832-1564
info@medallionfence.com || www.medallionfence.com

Style:

CAVALIER SF-DR

Series:

FAIRMONT™

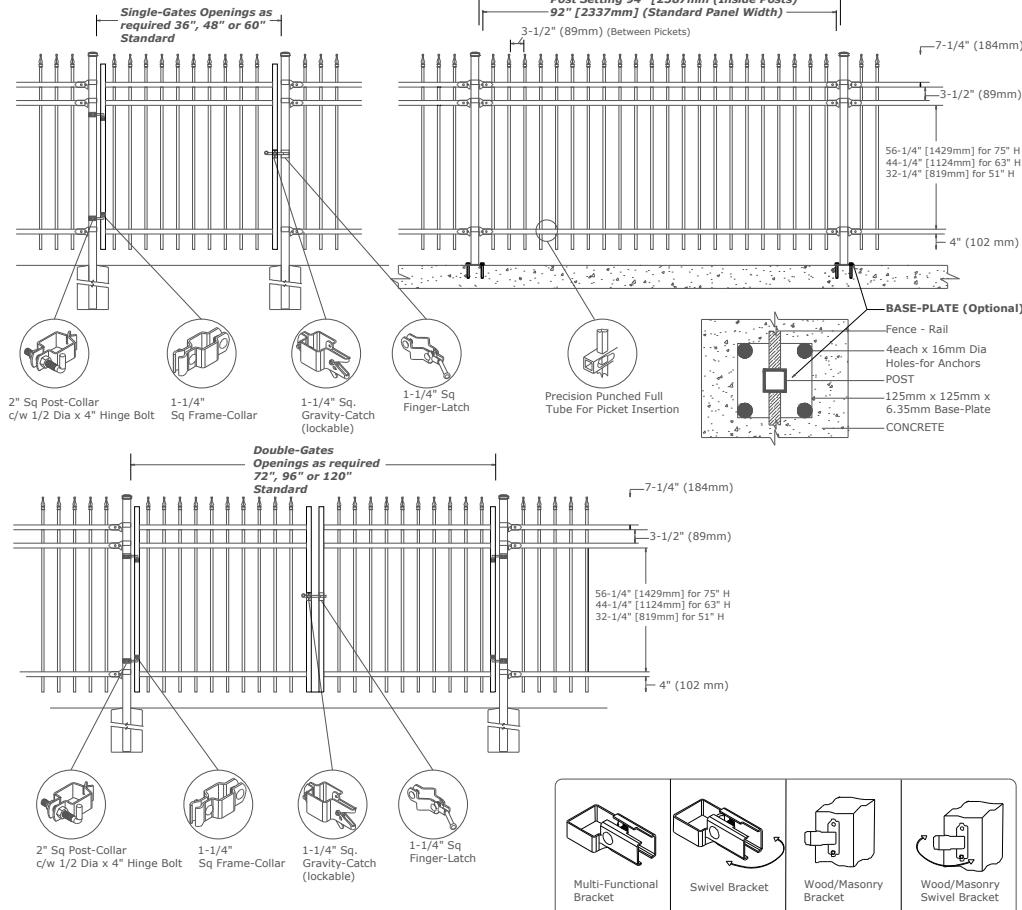

MATERIAL SPECIFICATIONS:

ARMOUR-SHIELD™
BY MEDALLION FENCE



OPTIONAL CAST FINIAL



OPTIONAL POST CAPS



SPECIFICATIONS

TUBE COMPOSITION - POSTS, RAILS & PICKETS

Coated Cold Formed ERW Tubing

- With a coating designation being a minimum protective coating weight of 275gm/m² both interior and exterior
- Top coat consisting of a chromium-free phosphate conversion coating
- Coating conforming to ASTM A1046 for hot dip coatings comprising of Zinc, Aluminum and Magnesium
- ERW tube conforming to ASTM A787 Type 6
- Minimum Yield Strength 207 MPa and Minimum Tensile Strength 290 MPa
- Weld seams mill re-metallized

MATERIAL DIMENSIONS

PICKET	5/8" x 5/8" (16mm x 16mm) 18 GA
RAILS	1-1/4" x 1-1/4" (32mm x 32mm) 16 GA
POSTS	2" x 2" (51mm x 51mm) 14 GA
OPTIONAL POST(1) REGULAR or BASE-PLATED	2" x 2" (51mm x 51mm) 11 GA
OPTIONAL POST(2) REGULAR or BASE-PLATED	2-1/2" x 2-1/2" (64mmx64mm)14 GA

WELDS	Stainless Steel Mig Weld
-------	--------------------------

FITTINGS	14 Gauge Stamp Forged Finish as below
----------	---------------------------------------

FITTING FASTENERS	JS1000 Plated Finish as below
-------------------	-------------------------------

OPTIONAL FASTENER	Tamper Proof Nuts
-------------------	-------------------

FINISH

GRADE	Super Durable Polyester Powder Coat		
OPTIONAL PRIMER	Zinc Rich Epoxy Powder Coat		
STANDARD COLOUR	SEMI-GLOSS - BLACK		
OTHER COLOURS	Green, Brown, White, Antique Silver		
CUSTOM COLOURS	Per Specifications		

STANDARD HEIGHT	51" 1295mm	63" 1600mm	75" 1905mm
	Custom heights are available (upon request)		

STANDARD GATES	Passage, Double Entry, Cantilever
----------------	-----------------------------------