




## Medallion Fence


10651 KEEL STREET  
MAPLE, ONTARIO L6A 3Y9  
(T) 905-832-2922 || 1-800-794-1564 || (F) 905-832-1564  
info@medallionfence.com || www.medallionfence.com

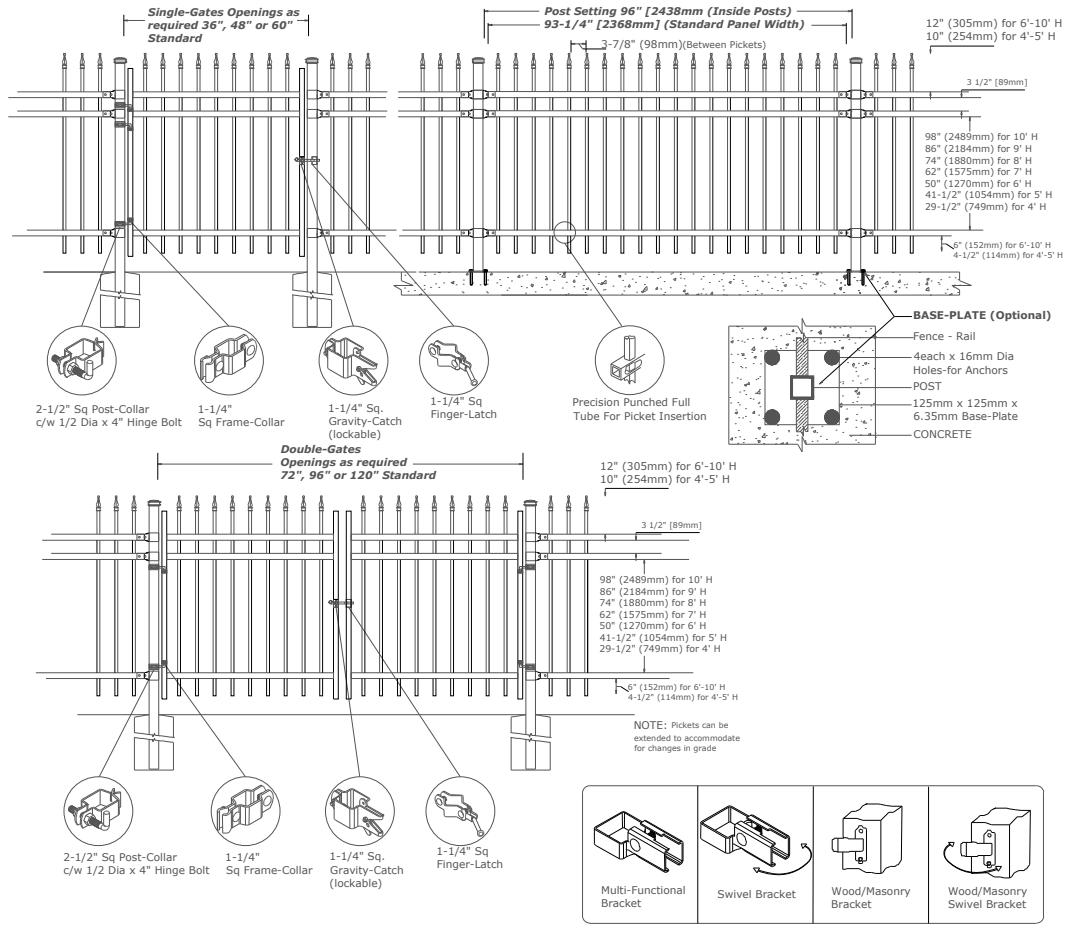


**MATERIAL SPECIFICATIONS:**  
ARMOUR-SHIELD™  
BY MEDALLION FENCE



### OPTIONAL CAST FINIAL



### OPTIONAL POST CAPS



## SPECIFICATIONS

### TUBE COMPOSITION - POSTS, RAILS & PICKETS

Coated Cold Formed ERW Tubing

- With a coating designation being a minimum protective coating weight of 275gm/m<sup>2</sup> both interior and exterior
- Top coat consisting of a chromium-free phosphate conversion coating
- Coating conforming to ASTM A1046 for hot dip coatings comprising of Zinc, Aluminum and Magnesium
- ERW tube conforming to ASTM A787 Type 6
- Minimum Yield Strength 207 MPa and Minimum Tensile Strength 290 MPa
- Weld seams mill re-metallized

## MATERIAL DIMENSIONS

PICKET	3/4" x 3/4" (19mm x 19mm) 18GA
RAILS	1-1/2" x 1-1/2" (38mm x 38mm) 16 GA
POSTS	2-1/2" x 2-1/2" (64mm x 64mm) 14 GA
OPTIONAL POST(1) REGULAR or BASE-PLATED	ALLIED SS40 2-1/2" (64mm) Sq./3" (76mm) Sq./4" (102mm) Sq
OPTIONAL POST(2) REGULAR or BASE-PLATED	SCH 40 HDG 2-1/2" (64mm) Sq./3" (76mm) Sq./4" (102mm) Sq
WELDS	Stainless Steel Mig Weld
FITTINGS	13 Gauge Stamp Forged Finish as below
FITTING FASTENERS	JS1000 Plated Finish as below
OPTIONAL FASTENER	Tamper Proof Nuts

## FINISH

GRADE	Super Durable Polyester Powder Coat
OPTIONAL PRIMER	Zinc Rich Epoxy Powder Coat
STANDARD COLOUR	SEMI-GLOSS - BLACK
OTHER COLOURS	Green, Brown, White, Antique Silver
CUSTOM COLOURS	Per Specifications

STANDARD HEIGHT	4'-4"	5'-5"	6'-4"	7'-4"	8'-4"	9'-4"	10'-4"
	1320mm	1625mm	1993mm	2235mm	2539mm	2844mm	3149mm
Custom heights are available (upon request)							

STANDARD GATES	Passage, Double Entry, Cantilever
----------------	-----------------------------------