




## Medallion Fence

10651 KEELE STREET  
 MAPLE, ONTARIO L6A 3Y9  
 (T) 905-832-2922 | 1-800-794-1564 | (F) 905-832-1564  
 info@medallionfence.com | www.medallionfence.com

**Style:**  
 IMPERIAL

**Series:**  
 OXFORD™

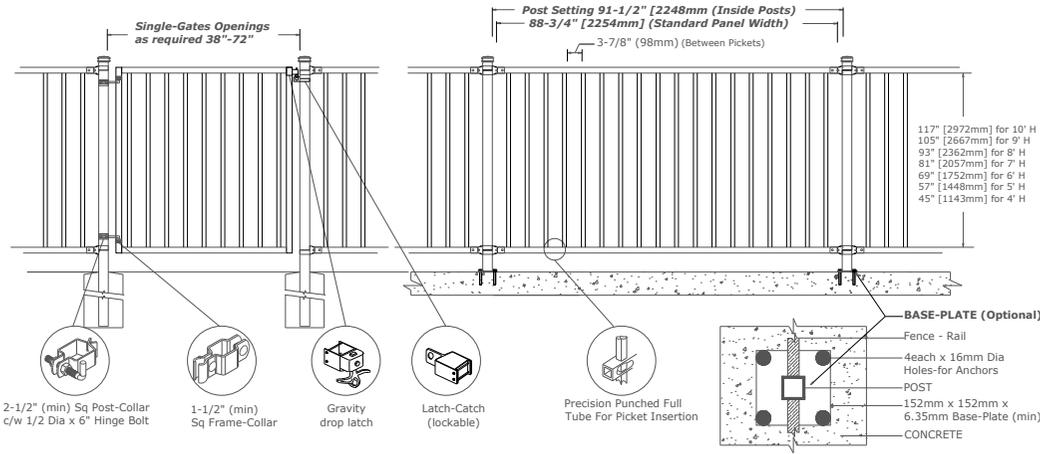

2-1/2" (min) Sq Post-Collar  
 c/w 1/2 Dia x 6" Hinge Bolt

1-1/2" (min) Sq Frame-Collar


Gravity drop latch

Latch-Catch (lockable)

Precision Punched Full Tube For Picket Insertion

**BASE-PLATE (Optional)**

- Fence - Rail
- 4each x 16mm Dia Holes-for Anchors
- POST
- 152mm x 152mm x 6.35mm Base-Plate (min)
- CONCRETE

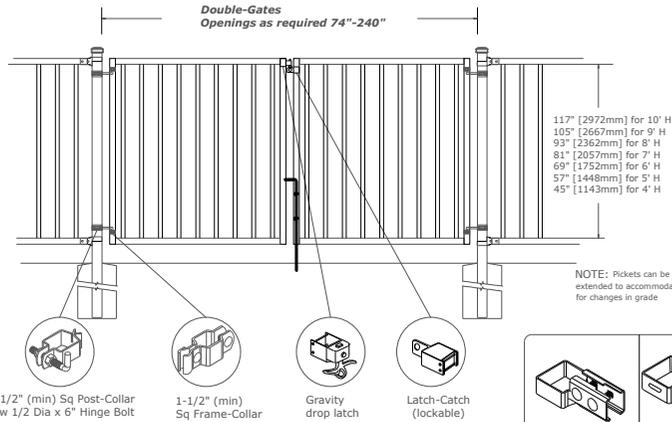


2-1/2" (min) Sq Post-Collar  
 c/w 1/2 Dia x 6" Hinge Bolt

1-1/2" (min) Sq Frame-Collar

Gravity drop latch

Latch-Catch (lockable)

NOTE: Pickets can be extended to accommodate for changes in grade

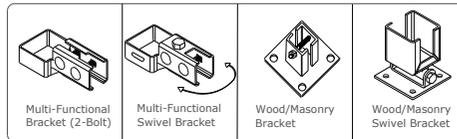

Multi-Functional Bracket (2-Bolt)

Multi-Functional Swivel Bracket

Wood/Masonry Bracket

Wood/Masonry Swivel Bracket

### MATERIAL SPECIFICATIONS:

ARMOUR-SHIELD™  
 BY MEDALLION FENCE

PROTECTED BY



ARMOUR-SHIELD™

### OPTIONAL POST CAPS

PYRAMID

BALL

SPIRAL

## SPECIFICATIONS

### TUBE COMPOSITION - POSTS, RAILS & PICKETS

Coated Cold Formed ERW Tubing

- o A minimum protective coating weight of 275gm/m<sup>2</sup> both interior and exterior
- o Top coat consisting of a chromium-free phosphate conversion coating
- o Coating conforming to ASTM A1046 for hot dip coatings comprising of Zinc, Aluminum and Magnesium
- o ERW tube conforming to ASTM A787 Type 6
- o Minimum Yield Strength 207 MPa and Minimum Tensile Strength 290 MPa
- o Weld seams mill re-metalized

## MATERIAL DIMENSIONS

PICKET	1" x 1" (25mm x 25mm) 16 GA
RAILS	1-1/2" x 1-1/2" (38mm x 38mm) 14 GA
POSTS REGULAR or BASE-PLATED	2-1/2" x 2-1/2" (64mm x 64mm) 14 GA
OPTIONAL POST(1) REGULAR or BASE-PLATED	3"(76mm) Sq./4"(102mm) Sq 11 GA or 14 GA
OPTIONAL POST(2) REGULAR or BASE-PLATED	HSS 3" (76mm) Sq./4" (102mm) Sq./6" (152mm) Sq.

<b>WELDS</b>	Stainless Steel Mig Weld
--------------	--------------------------

<b>FITTINGS</b>	12 Gauge Stamp Forged Finish as below
-----------------	---------------------------------------

FITTING FASTENERS	JS1000 Plated Finish as below
-------------------	-------------------------------

OPTIONAL FASTENER	Tamper Proof Nuts
-------------------	-------------------

## FINISH

<b>GRADE</b>	Super Durable Polyester Powder Coat
OPTIONAL PRIMER	Zinc Rich Epoxy Powder Coat
STANDARD COLOUR	SEMI-GLOSS - BLACK
OTHER COLOURS	Green, Brown, White, Antique Silver
CUSTOM COLOURS	Per Specifications

<b>STANDARD HEIGHTS</b>	4' 1219mm	5' 1524mm	6' 1892mm	7' 2134mm	8' 2438mm	9' 2743mm	10' 3048mm
	Custom heights are available (upon request)						

<b>STANDARD GATES</b>	Passage, Double Entry, Cantilever
-----------------------	-----------------------------------