




Medallion Fence

10651 KEELE STREET
 MAPLE, ONTARIO L6A 3Y9
 (T) 905-832-2922 || 1-800-794-1564 || (F) 905-832-1564
 info@medallionfence.com || www.medallionfence.com

Medallion Fence

Style:
 STANTON-REP

Series:
 OXFORD™

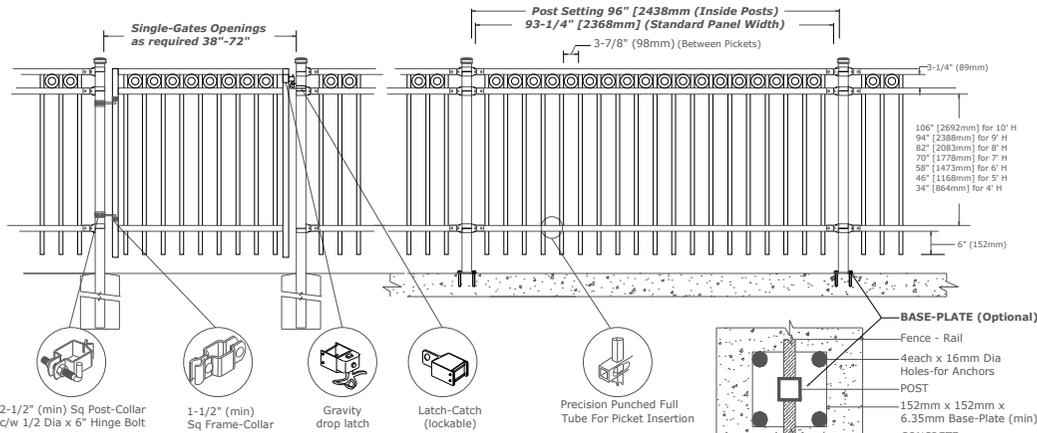

2-1/2" (min) Sq Post-Collar
 c/w 1/2 Dia x 6" Hinge Bolt


1-1/2" (min) Sq
 Frame-Collar

Gravity
 drop latch

Latch-Catch
 (lockable)

Precision Punched Full
 Tube For Picket Insertion

BASE-PLATE (Optional)
 Fence - Rail
 4 each x 16mm Dia
 Holes-for Anchors
 POST
 152mm x 152mm x
 6.35mm Base-Plate (min)
 CONCRETE

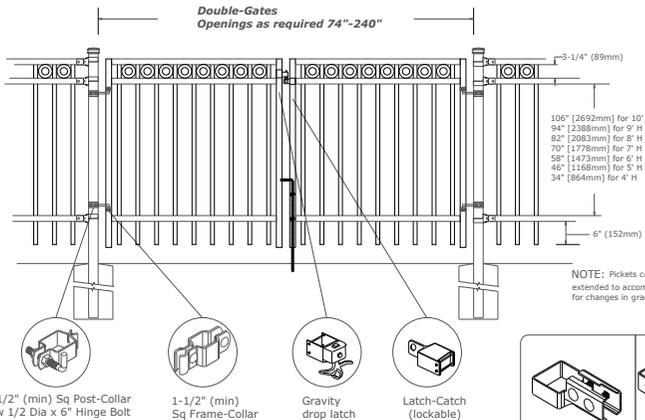


2-1/2" (min) Sq Post-Collar
 c/w 1/2 Dia x 6" Hinge Bolt

1-1/2" (min) Sq
 Frame-Collar

Gravity
 drop latch

Latch-Catch
 (lockable)

NOTE: Pickets can be
 extended to accommodate
 for changes in grade

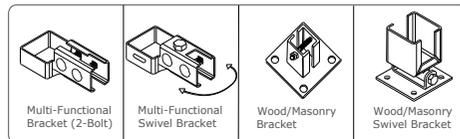

Multi-Functional
 Bracket (2-Bolt)

Multi-Functional
 Swivel Bracket

Wood/Masonry
 Bracket

Wood/Masonry
 Swivel Bracket

MATERIAL SPECIFICATIONS:

ARMOUR-SHIELD™
 BY MEDALLION FENCE

PROTECTED BY



ARMOUR-SHIELD

OPTIONAL POST CAPS

PYRAMID

BALL

SPIRAL

SPECIFICATIONS

TUBE COMPOSITION - POSTS , RAILS & PICKETS

Coated Cold Formed ERW Tubing

- o A minimum protective coating weight of 275gm/m² both interior and exterior
- o Top coat consisting of a chromium-free phosphate conversion coating
- o Coating conforming to ASTM A1046 for hot dip coatings comprising of Zinc, Aluminum and Magnesium
- o ERW tube conforming to ASTM A787 Type 6
- o Minimum Yield Strength 207 MPa and Minimum Tensile Strength 290 MPa
- o Weld seams mill re-metalized

MATERIAL DIMENSIONS

PICKET	1" x 1" (25mm x 25mm) 16 GA
RAILS	1-1/2" x 1-1/2" (38mm x 38mm) 14 GA
POSTS REGULAR or BASE-PLATED	2-1/2" x 2-1/2" (64mm x 64mm) 14 GA
OPTIONAL POST(1) REGULAR or BASE-PLATED	3"(76mm) Sq./4"(102mm) Sq 11 GA or 14 GA
OPTIONAL POST(2) REGULAR or BASE-PLATED	HSS 3" (76mm) Sq./4" (102mm) Sq./6" (152mm) Sq.

WELDS	Stainless Steel Mig Weld
--------------	--------------------------

FITTINGS	12 Gauge Stamp Forged Finish as below
-----------------	---------------------------------------

FITTING FASTENERS	JS1000 Plated Finish as below
-------------------	-------------------------------

OPTIONAL FASTENER	Tamper Proof Nuts
-------------------	-------------------

FINISH

GRADE	Super Durable Polyester Powder Coat
OPTIONAL PRIMER	Zinc Rich Epoxy Powder Coat
STANDARD COLOUR	SEMI-GLOSS - BLACK
OTHER COLOURS	Green, Brown, White, Antique Silver
CUSTOM COLOURS	Per Specifications

STANDARD HEIGHTS	4' 1219mm	5' 1524mm	6' 1892mm	7' 2134mm	8' 2438mm	9' 2743mm	10' 3048mm
	Custom heights are available (upon request)						

STANDARD GATES	Passage, Double Entry, Cantilever
----------------	-----------------------------------