



Medallion Fence



10651 KEELE STREET  
MAPLE, ONTARIO L6A 3Y9  
(T) 905-832-2922 || 1-800-794-1564 || (F) 905-832-1564  
info@medallionfence.com || www.medallionfence.com

Medallion Fence


STYLE:  
STANTON

SERIES:  
WELLINGTON™


SINGLE-GATES OPENINGS  
AS REQUIRED 36", 46"  
OR 60" STANDARD

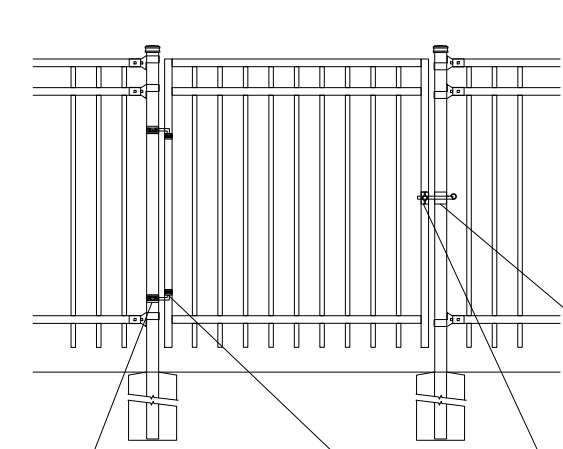


2" SQ POST-COLLAR  
C/W 1/2 DIA X 4"  
HINGE BOLT



1-1/4"SQ  
FRAME-COLLAR





1-1/4" SQ  
FINGER-LATCH




2" SQ.  
GRAVITY-CATCH  
(LOCKABLE)


DOUBLE-GATES OPENINGS AS  
REQUIRED 72", 92" OR 120"  
STANDARD

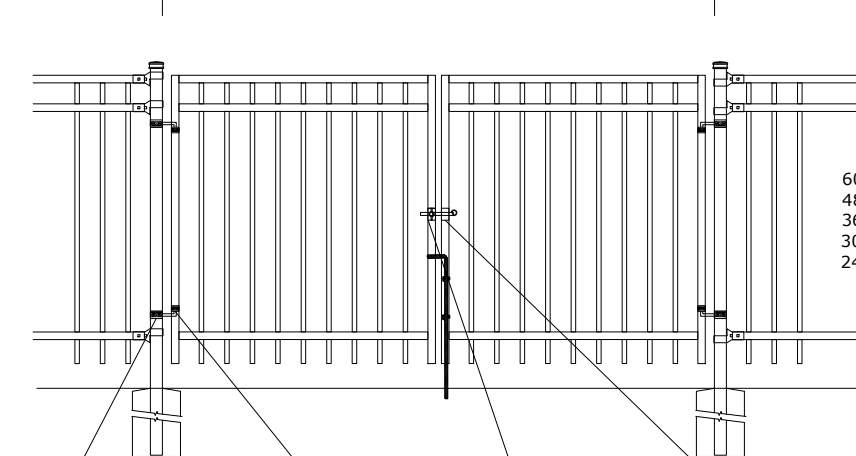


2" SQ POST-COLLAR  
C/W 1/2 DIA X 4"  
HINGE BOLT





1-1/4"SQ  
FRAME-COLLAR




1-1/4" SQ  
FINGER-LATCH



2" SQ.  
GRAVITY-CATCH  
(LOCKABLE)

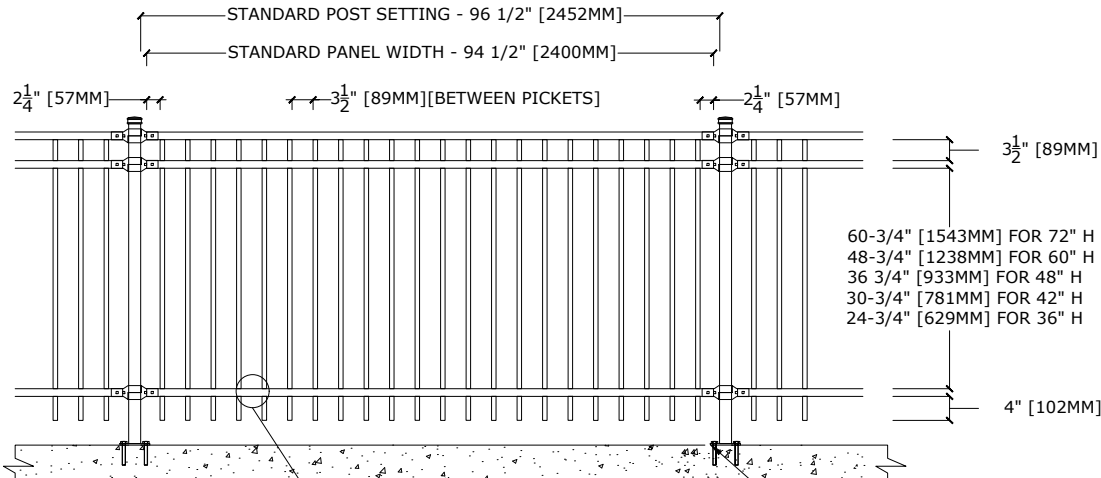

PRECISION PUNCHED FULL  
TUBE FOR PICKET INSERTION

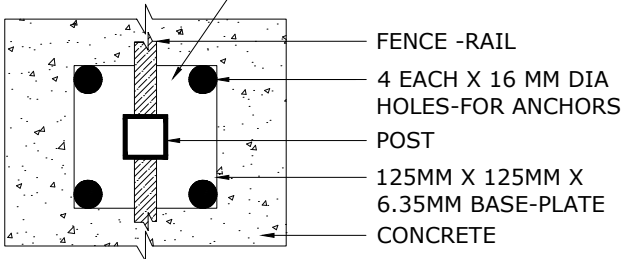

BASE-PLATE (OPTIONAL)


FENCE -RAIL

4 EACH X 16 MM DIA  
HOLES-FOR ANCHORS


POST

125MM X 125MM X  
6.35MM BASE-PLATE  
CONCRETE

BRACKET




MULTI-FUNCTIONAL  
BRACKET




WOOD/MASONRY BRACKET

SWIVEL BRACKET



SWIVEL BRACKET



WOOD/MASONRY SWIVEL  
BRACKET

PROTECTED BY



ARMOUR-SHIELD™


OPTIONAL POST CAPS



PYRAMID



BALL



SPIRAL

MATERIAL SPECIFICATIONS:

ARMOUR-SHIELD™  
BY MEDALLION FENCE

SPECIFICATIONS

TUBE COMPOSITION - POSTS , RAILS & PICKETS

- MINIMUM YIELD STRENGTH: 45 KSI (310 MPA)
- MINIMUM TENSILE STRENGTH: 55 KSI (380 MPA)
- ASTM A787 (TUBE)
- TUBE MANUFACTURED FROM PRE-COATED ALUMINUM-ZINC COATED STEEL WITH COATING DESIGNATION AZ50 CONFORMING TO ASTM A792/A792M

MATERIAL DIMENSIONS

|                                         |                                              |
|-----------------------------------------|----------------------------------------------|
| PICKET                                  | 3/4" x 3/4" (19mm x 19mm) 18 GA              |
| RAILS                                   | 1-1/4" x 1-1/4" (32mm x 32mm) 16 GA          |
| POSTS<br>REGULAR or BASE-PLATED         | 2" x 2" (51mm x 51mm) 16 GA or 14 GA         |
| OPTIONAL POST<br>REGULAR or BASE-PLATED | 2-1/2" x 2-1/2" (64mmx64mm) 14 GA            |
| UPRIGHTS                                | 1-1/4" x 1-1/4" (32mm x 32mm) 16 GA or 14 GA |

|                   |                                       |
|-------------------|---------------------------------------|
| WELDS             | Stainless Steel Mig Weld              |
| FITTINGS          | 14 Gauge Stamp Forged Finish as below |
| FITTING FASTENERS | JS1000 Plated Finish as below         |
| OPTIONAL FASTENER | Tamper Proof Nuts                     |

FINISH

|                     |                                     |
|---------------------|-------------------------------------|
| GRADE               | Super Durable Polyester Powder Coat |
| OPTIONAL PRIMER     | Zinc Rich Epoxy Powder Coat         |
| OPTIONAL PRIMER (2) | E-Coat                              |
| STANDARD COLOUR     | SEMI-GLOSS - BLACK                  |
| OTHER COLOURS       | Green, Brown, White, Antique Silver |
| CUSTOM COLOURS      | Per Specifications                  |

|                  |                                             |               |               |               |               |
|------------------|---------------------------------------------|---------------|---------------|---------------|---------------|
| STANDARD HEIGHTS | 36"<br>914mm                                | 42"<br>1067mm | 48"<br>1219mm | 60"<br>1524mm | 72"<br>1892mm |
|                  | Custom heights are available (upon request) |               |               |               |               |

|                |                                   |
|----------------|-----------------------------------|
| STANDARD GATES | Passage, Double Entry, Cantilever |
|----------------|-----------------------------------|

STANDARD POST SETTING & PANEL WIDTH

| FOR FENCE HEIGHTS | PANEL WIDTH      | POST SPACING [OPENING] |
|-------------------|------------------|------------------------|
| Up to 6' [1829mm] | 94 1/2" [2400MM] | 96 1/2" [2452 MM]      |
| Over 6' [1829mm]  | NA               |                        |