




## Medallion Fence

10651 KEELE STREET  
 MAPLE, ONTARIO L6A 3Y9  
 (T) 905-832-2922 | 1-800-794-1564 | (F) 905-832-1564  
 info@medallionfence.com | www.medallionfence.com

**Style:**  
 CAVALIER-DR-SF-REO/RP

**Series:**  
 PRESTON™

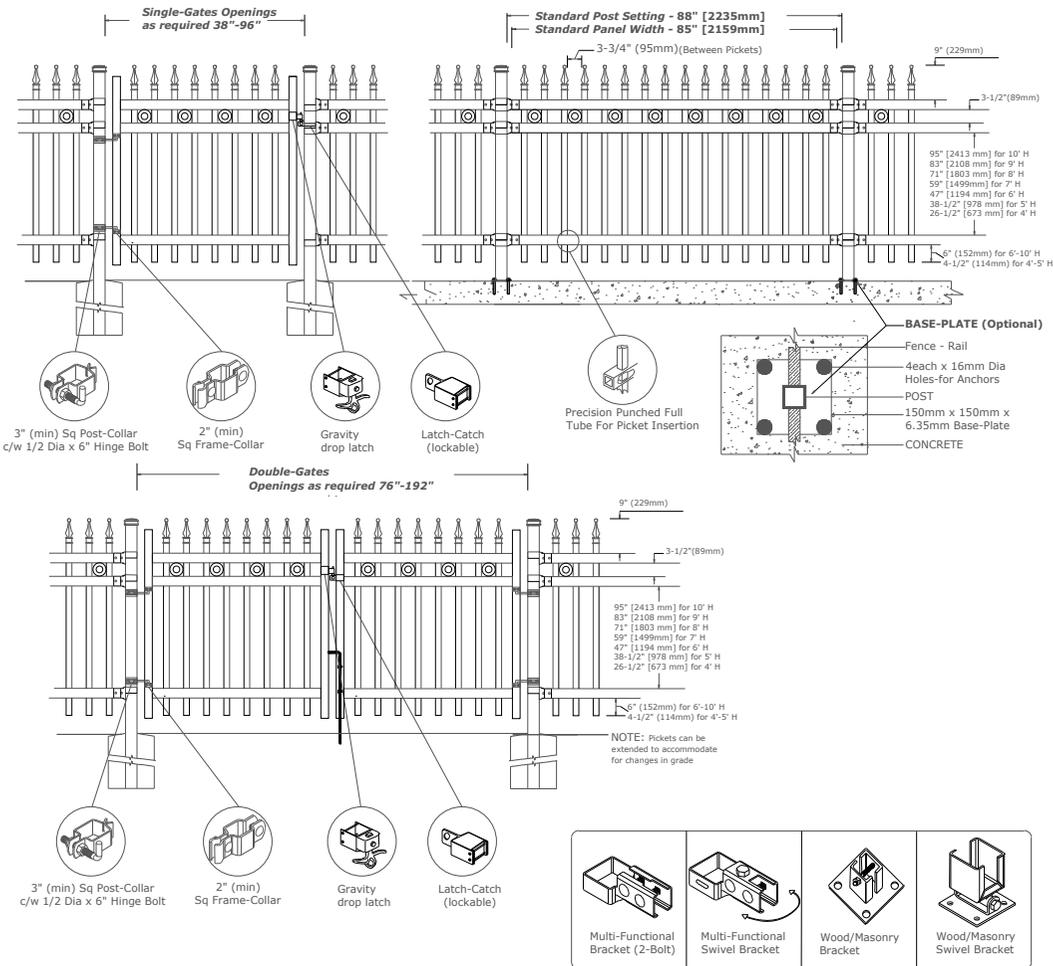

**MATERIAL SPECIFICATIONS:**  
 ARMOUR-SHIELD™  
 BY MEDALLION FENCE

PROTECTED BY



OPTIONAL CAST FINIAL



OPTIONAL POST CAPS



## SPECIFICATIONS

### TUBE COMPOSITION - POSTS, RAILS & PICKETS

Coated Cold Formed ERW Tubing

- With a coating designation being a minimum protective coating weight of 275gm/m<sup>2</sup> both interior and exterior
- Top coat consisting of a chromium-free phosphate conversion coating
- Coating conforming to ASTM A1046 for hot dip coatings comprising of Zinc, Aluminum and Magnesium
- ERW tube conforming to ASTM A787 Type 6
- Minimum Yield Strength 207 MPa and Minimum Tensile Strength 290 MPa
- Weld seams mill re-metalized

### MATERIAL DIMENSIONS

PICKET	1-1/2" x 3/4" [38mm x 19mm] 16GA
RAILS	2-1/2" x 1-1/2" [64mm x 38mm] 16 GA
POSTS	3" x 3" [76mm x 76mm] 14 GA
OPTIONAL POST(1) REGULAR or BASE-PLATED	3" x 3" (76mmx76mm) 11GA 4" x 4" (102mmx102mm) 11GA
WELDS	Stainless Steel Mig Weld
FITTINGS	12 Gauge Stamp Forged Finish as below
FITTING FASTENERS	JS1000 Plated Finish as below
OPTIONAL FASTENER	Tamper Proof Nuts

### FINISH

GRADE	Super Durable Polyester Powder Coat
OPTIONAL PRIMER	Zinc Rich Epoxy Powder Coat
STANDARD COLOUR	SEMI-GLOSS - BLACK
OTHER COLOURS	Green, Brown, White, Antique Silver
CUSTOM COLOURS	Per Specifications

STANDARD HEIGHTS	4'-3"	5'-3"	6'-3"	7'-3"	8'-3"	9'-3"	10'-3"
	1295mm	1600mm	1905mm	2210mm	2515mm	2819mm	3124mm
Custom heights are available (upon request)							

STANDARD GATES: Passage, Double Entry, Cantilever

### STANDARD POST SETTING & PANEL WIDTH

FOR FENCE HEIGHTS	PANEL WIDTH	POST SPACING [OPENING]
Up to 6' [1829mm]	85" [2159mm]	88" [2235mm]
Over 6' [1829mm]	85" [2159mm] or as required	