



## Medallion Fence


10651 KEELE STREET  
MAPLE, ONTARIO L6A 3Y9  
(T) 905-832-2922 || 1-800-794-1564 || (F) 905-832-1564  
info@medallionfence.com || www.medallionfence.com

### Style:

CAVALIER-DR-SF-REO

### Series:

PRESTON™

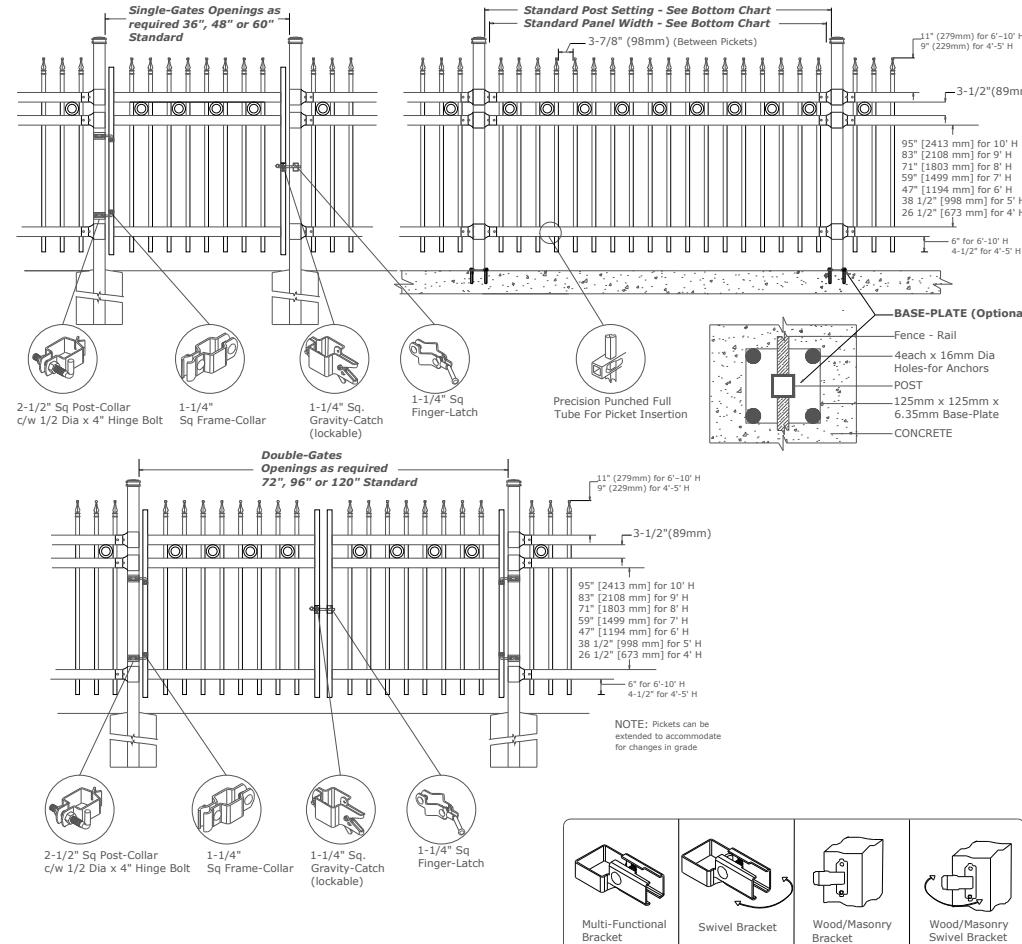


### MATERIAL SPECIFICATIONS:

ARMOUR-SHIELD™  
BY MEDALLION FENCE


### PROTECTED BY



### OPTIONAL CAST FINIAL



### OPTIONAL POST CAPS



## SPECIFICATIONS

### TUBE COMPOSITION - POSTS , RAILS & PICKETS

Coated Cold Formed ERW Tubing  
o With a coating designation being a minimum protective coating weight of 275g/m<sup>2</sup> both interior and exterior  
o Top coat consisting of a chromium-free phosphate conversion coating  
o Coating conforming to ASTM A1046 for hot dip coatings comprising of Zinc, Aluminum and Magnesium  
o ERW tube conforming to ASTM A787 Type 6  
o Minimum Yield Strength 207 MPa and Minimum Tensile Strength 290 MPa  
Weld seams mill re-metallized

## MATERIAL DIMENSIONS

PICKET	1" x 1" (25mm x 25mm) 16GA
RAILS	2-1/2" x 1-1/2" [64mm x 38mm] 16 GA
POSTS	3" x 3" [76mm x 76mm] 14 GA
OPTIONAL POST(1) REGULAR or BASE-PLATED	Larger profiles available – contact Medallion Fence
WELDS	Stainless Steel Mig Weld
FITTINGS	12 Gauge Stamp Forged Finish as below
FITTING FASTENERS	JS1000 Plated Finish as below
OPTIONAL FASTENER	Tamper Proof Nuts

## FINISH

GRADE	Super Durable Polyester Powder Coat
OPTIONAL PRIMER	Zinc Rich Epoxy Powder Coat
STANDARD COLOUR	SEMI-GLOSS - BLACK
OTHER COLOURS	Green, Brown, White, Antique Silver
CUSTOM COLOURS	Per Specifications

STANDARD HEIGHT	4'-3" 1295mm	5'-3" 1600mm	6'-3" 1905mm	7'-3" 2210mm	8'-3" 2515mm	9'-3" 2819mm	10'-3" 3124mm
	Custom heights are available (upon request)						

STANDARD GATES Passage, Double Entry, Cantilever

## STANDARD POST SETTING & PANEL WIDTH

FOR FENCE HEIGHTS	PANEL WIDTH	POST SPACING [OPENING]
Up to 6' [1829mm]	98" [2489mm]	101" [2565mm]
Over 6' [1829mm]	69" [1753mm]	71" [1803mm]