







Medallion Fence

10651 KEELE STREET  
MAPLE, ONTARIO L6A 3Y9  
(T) 905-832-2922 || 1-800-794-1564 || (F) 905-832-1564  
info@medallionfence.com || www.medallionfence.com


Medallion Fence

STYLE:  
ARISTOCRAT-DR-REP-AL

SERIES:  
PRESTON RP™

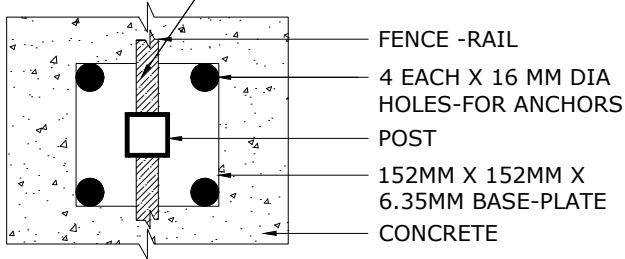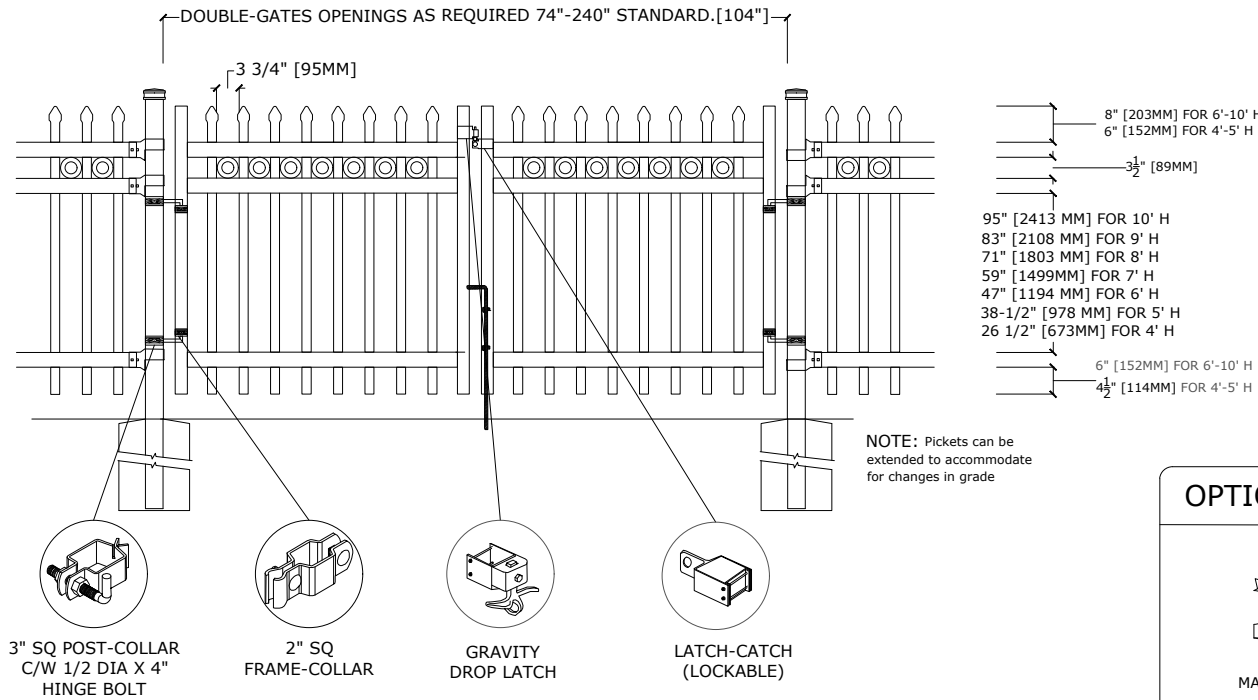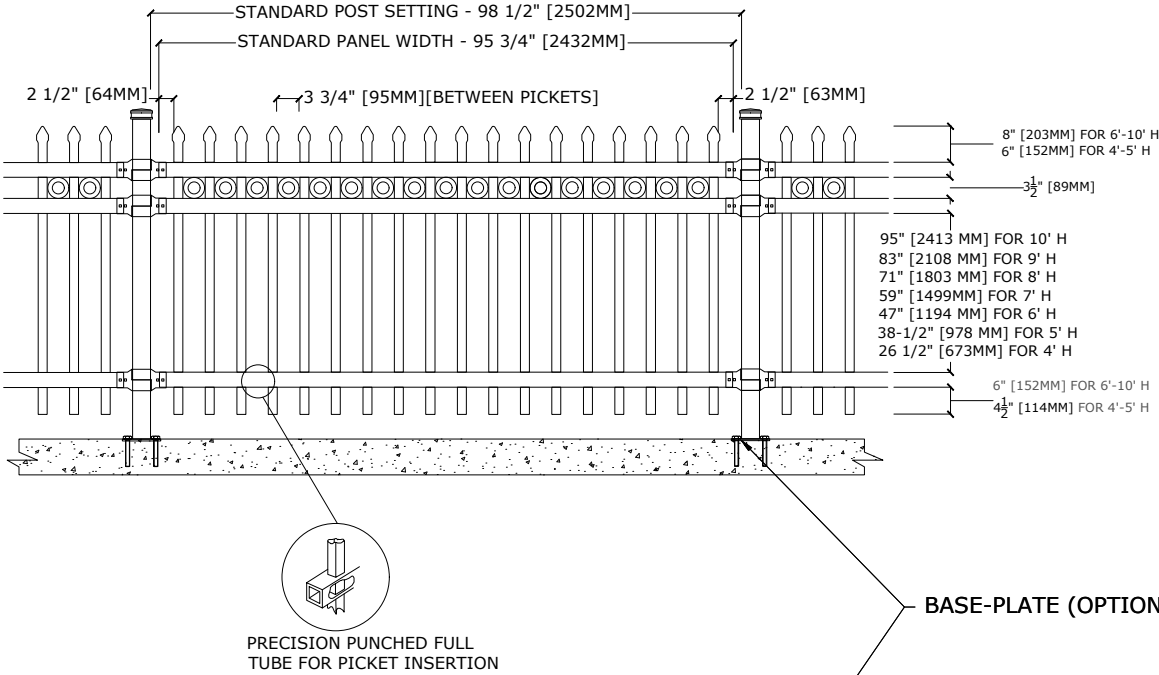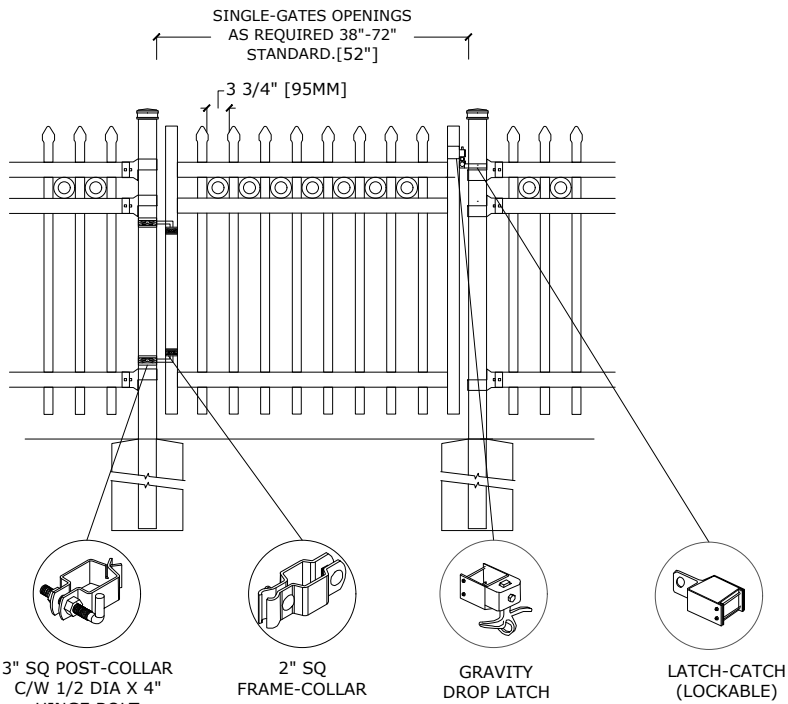

OPTIONAL PICKET DESIGNS




MAPLE LEAF




ARROW

BRACKET



MULTI-FUNCTIONAL  
BRACKET



WOOD/MASONRY BRACKET

OPTIONAL POST CAPS



PYRAMID




BALL




SPIRAL

SWIVEL BRACKET



MULTI-FUNCTIONAL  
SWIVEL BRACKET



WOOD/MASONRY SWIVEL  
BRACKET

MATERIAL SPECIFICATIONS:

ALU-TUFF™  
BY MEDALLION FENCE

PROTECTED BY



SPECIFICATIONS

TUBE COMPOSITION - POSTS , RAILS & PICKETS

- HIGH-STRENGTH EXTRUDED ALUMINUM ALLOY (6061-T4 & 6061-T6 TEMPER)
- ULTIMATE TENSILE STRENGTH: ≈ 290 MPA (T4), ≈ 339 MPA (T6)
- YIELD STRENGTH: ≈ 210 MPA (T4), ≈ 317 MPA (T6)
- ELONGATION: ≈ 8%-16% (T6), UP TO ~16%+ (T4) DEPENDING ON THICKNESS

MATERIAL DIMENSIONS

|                                         |                                                        |
|-----------------------------------------|--------------------------------------------------------|
| PICKET                                  | 1-1/2" x 3/4" (38mm x 19mm) .065 Wall                  |
| RAILS                                   | 2-1/2" x 1-1/2" (64mm x 38mm) .125 Wall                |
| POSTS<br>REGULAR or BASE-PLATED         | 3" x 3" [76mm x 76mm] .188 Wall                        |
| OPTIONAL POST<br>REGULAR or BASE-PLATED | Larger profiles available<br>– contact Medallion Fence |
| UPRIGHTS                                | 2" x 2" [51mm x 51mm] .188Wall                         |

|                   |                                       |
|-------------------|---------------------------------------|
| WELDS             | Aluminum Mig Weld                     |
| FITTINGS          | 12 Gauge Stamp Forged Finish as below |
| FITTING FASTENERS | JS1000 Plated Finish as below         |
| OPTIONAL FASTENER | Tamper Proof Nuts                     |

FINISH

|                     |                                     |
|---------------------|-------------------------------------|
| GRADE               | Super Durable Polyester Powder Coat |
| OPTIONAL PRIMER     | Zinc Rich Epoxy Powder Coat         |
| OPTIONAL PRIMER (2) | E-Coat                              |
| STANDARD COLOUR     | SEMI-GLOSS - BLACK                  |
| OTHER COLOURS       | Green, Brown, White, Antique Silver |
| CUSTOM COLOURS      | Per Specifications                  |

|                     |                                             |              |              |              |              |              |               |
|---------------------|---------------------------------------------|--------------|--------------|--------------|--------------|--------------|---------------|
| STANDARD<br>HEIGHTS | 4'<br>1219MM                                | 5'<br>1524MM | 6'<br>1892MM | 7'<br>2134MM | 8'<br>2438MM | 9'<br>2743MM | 10'<br>3048MM |
|                     | Custom heights are available (upon request) |              |              |              |              |              |               |

|                |                                   |
|----------------|-----------------------------------|
| STANDARD GATES | Passage, Double Entry, Cantilever |
|----------------|-----------------------------------|

STANDARD POST SETTING & PANEL WIDTH

| FOR FENCE HEIGHTS | PANEL WIDTH      | POST SPACING<br>[OPENING] |
|-------------------|------------------|---------------------------|
| Up to 6' [1829mm] | 95 3/4" [2432MM] | 98 1/2" [2502MM]          |
| Over 6' [1829mm]  | 95 3/4" [2432MM] | 98 1/2" [2502MM]          |