







Medallion Fence

10651 KEELE STREET
MAPLE, ONTARIO L6A 3Y9
(T) 905-832-2922 || 1-800-794-1564 || (F) 905-832-1564
info@medallionfence.com || www.medallionfence.com


Medallion Fence

STYLE:
STANTON-REO-AL


SERIES:
PRESTON™

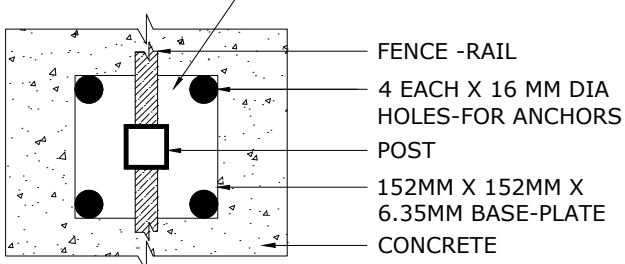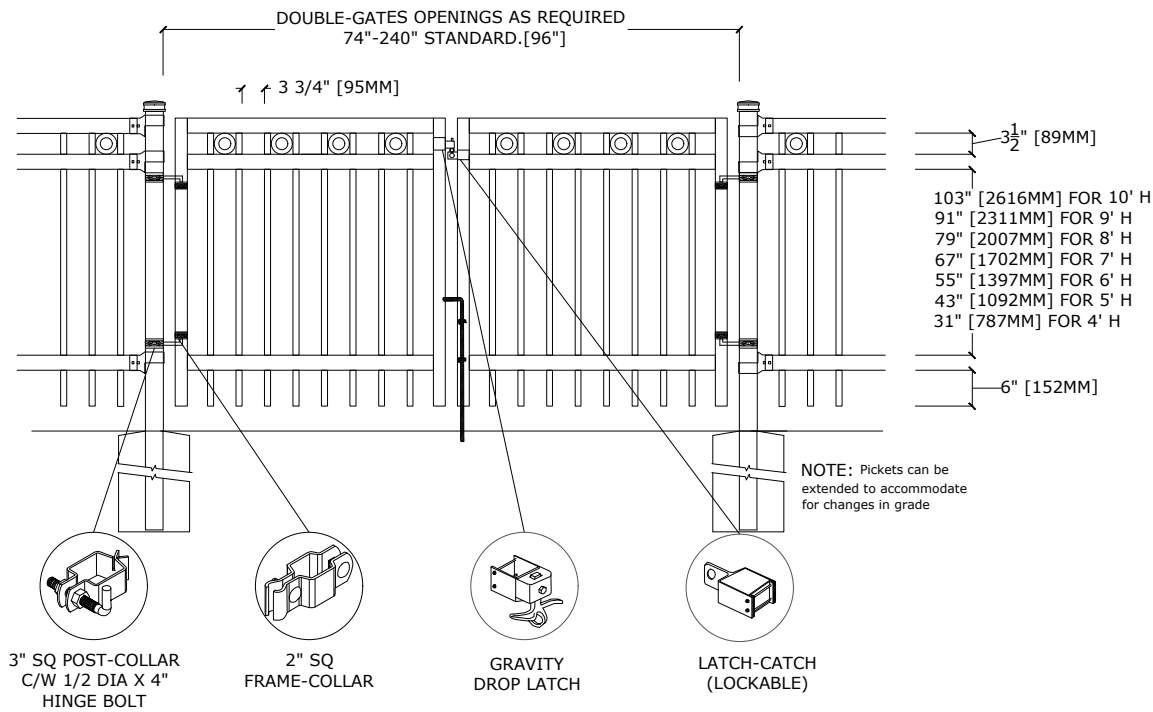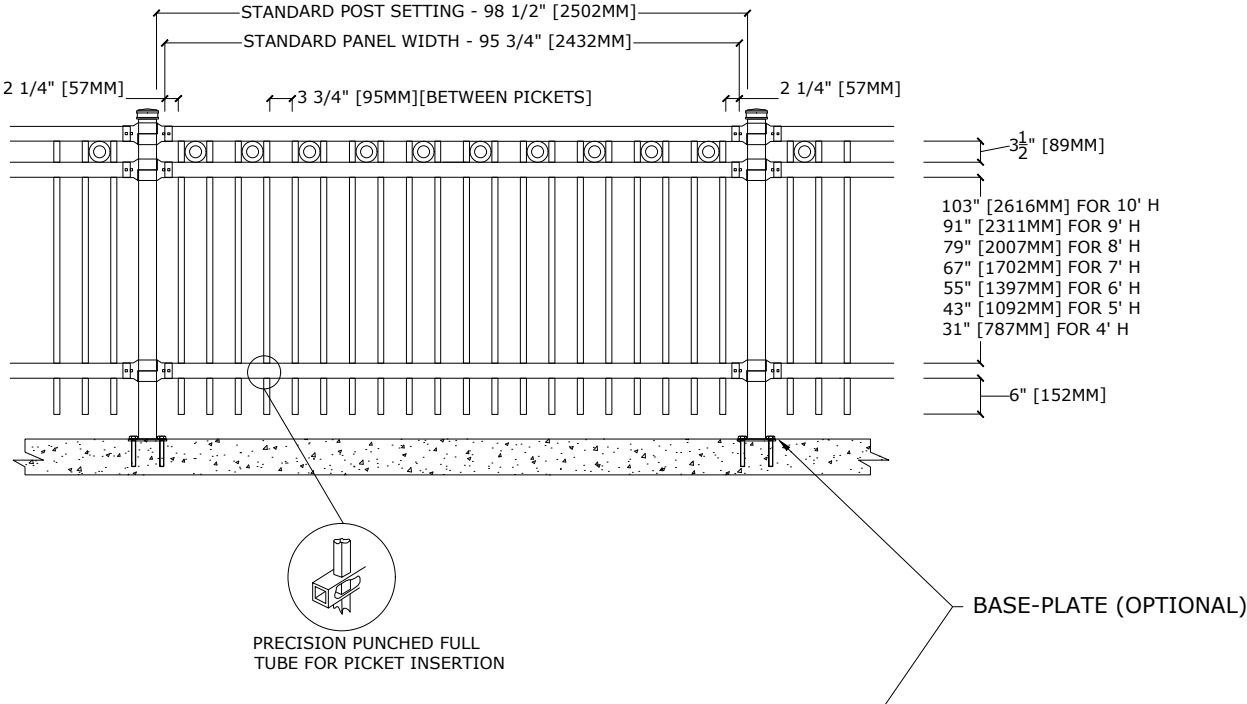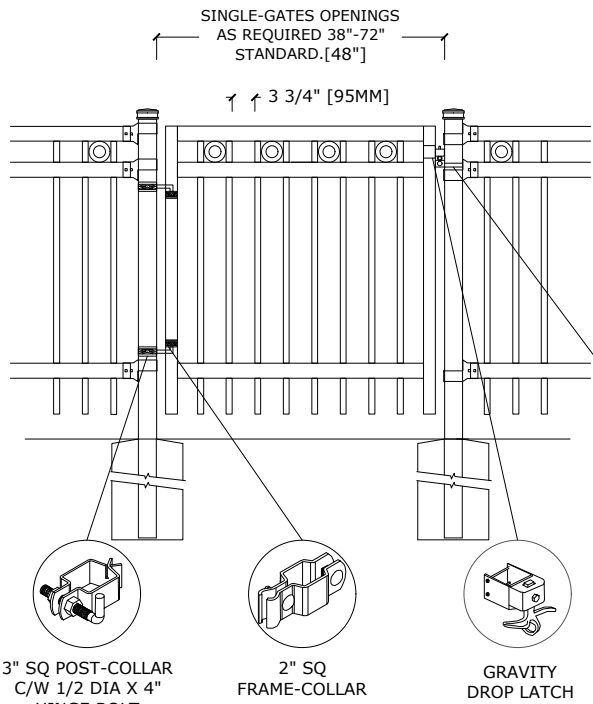

BRACKET




MULTI-FUNCTIONAL
BRACKET




WOOD/MASONRY BRACKET

SWIVEL BRACKET



MULTI-FUNCTIONAL
SWIVEL BRACKET



WOOD/MASONRY SWIVEL
BRACKET

MATERIAL SPECIFICATIONS:

ALU-TUFF™
BY MEDALLION FENCE

PROTECTED BY



OPTIONAL POST CAPS



PYRAMID



BALL



SPIRAL

SPECIFICATIONS

TUBE COMPOSITION - POSTS , RAILS & PICKETS

- HIGH-STRENGTH EXTRUDED ALUMINUM ALLOY (6061-T4 & 6061-T6 TEMPER)
- ULTIMATE TENSILE STRENGTH: ≈ 290 MPA (T4), ≈ 339 MPA (T6)
- YIELD STRENGTH: ≈ 210 MPA (T4), ≈ 317 MPA (T6)
- ELONGATION: ≈ 8%-16% (T6), UP TO ~16%+ (T4) DEPENDING ON THICKNESS

MATERIAL DIMENSIONS

PICKET	1" x 1" (25mm x 25mm) .065 Wall
RAILS	2-1/2" x 1-1/2" (64mm x 38mm) .125 Wall
POSTS REGULAR or BASE-PLATED	3" x 3" [76mm x 76mm] .188 Wall
OPTIONAL POST REGULAR or BASE-PLATED	Larger profiles available - contact Medallion Fence
UPRIGHTS	2" x 2" [51mm x 51mm] .188Wall

WELDS Aluminum Mig Weld

FITTINGS 12 Gauge Stamp Forged Finish as below

FITTING FASTENERS JS1000 Plated Finish as below

OPTIONAL FASTENER Tamper Proof Nuts

FINISH

GRADE Super Durable Polyester Powder Coat

OPTIONAL PRIMER Zinc Rich Epoxy Powder Coat

OPTIONAL PRIMER (2) E-Coat

STANDARD COLOUR SEMI-GLOSS - BLACK

OTHER COLOURS Green, Brown, White, Antique Silver

CUSTOM COLOURS Per Specifications

STANDARD
HEIGHTS

4' 1219MM	5' 1524MM	6' 1892MM	7' 2134MM	8' 2438MM	9' 2743MM	10' 3048MM
--------------	--------------	--------------	--------------	--------------	--------------	---------------

Custom heights are available (upon request)

STANDARD GATES Passage, Double Entry, Cantilever

STANDARD POST SETTING & PANEL WIDTH

FOR FENCE HEIGHTS	PANEL WIDTH	POST SPACING [OPENING]
Up to 6' [1829mm]	95 3/4" [2432MM]	98 1/2" [2502MM]
Over 6' [1829mm]	95 3/4" [2432MM]	98 1/2" [2502MM]