



Medallion Fence



10651 KEELE STREET
MAPLE, ONTARIO L6A 3Y9
(T) 905-832-2922 || 1-800-794-1564 || (F) 905-832-1564
info@medallionfence.com || www.medallionfence.com

Medallion Fence


STYLE:
STANTON-REO

SERIES:
PRESTON™


SINGLE-GATES OPENINGS
AS REQUIRED 38"-72"
STANDARD.[48"]

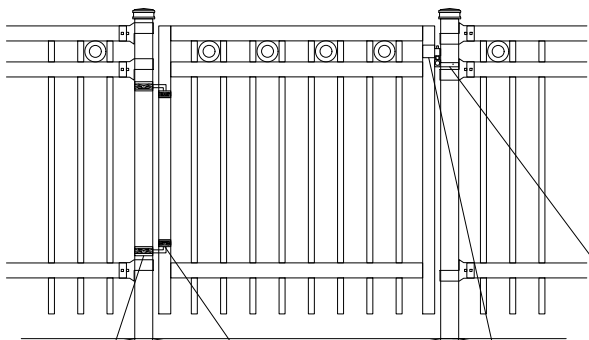


3" SQ POST-COLLAR
C/W 1/2 DIA X 4"
HINGE BOLT



2" SQ
FRAME-COLLAR





GRAVITY
DROP LATCH




LATCH-CATCH
(LOCKABLE)


DOUBLE-GATES OPENINGS AS
REQUIRED 74"-240" STANDARD.[104"]

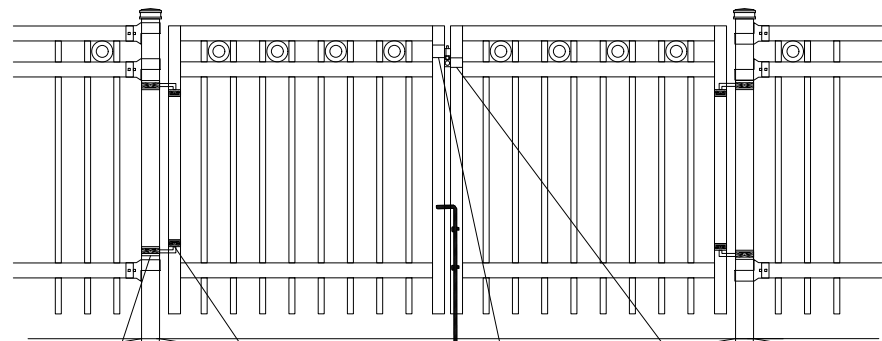


3" SQ POST-COLLAR
C/W 1/2 DIA X 4"
HINGE BOLT



2" SQ
FRAME-COLLAR





GRAVITY
DROP LATCH



LATCH-CATCH
(LOCKABLE)

NOTE: Pickets can be
extended to accommodate
for changes in grade

STANDARD POST SETTING - 91 1/2" [2324MM]
STANDARD PANEL WIDTH - 88 3/4" [2255MM]

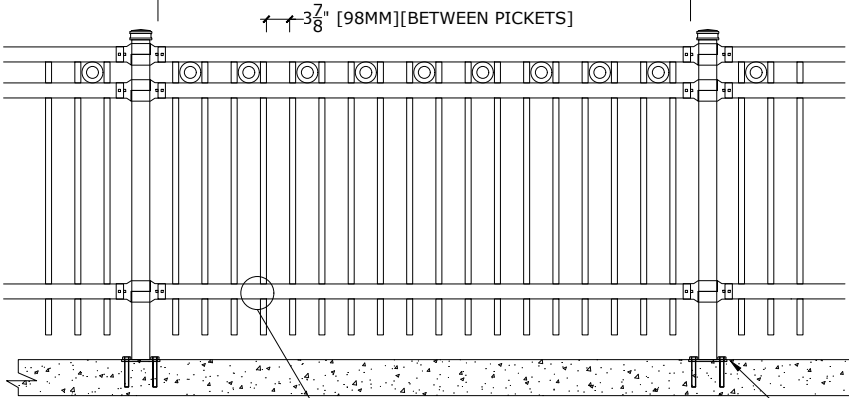


PRECISION PUNCHED FULL
TUBE FOR PICKET INSERTION

3 1/2" [89MM]

103" [2616MM] FOR 10' H
91" [2311MM] FOR 9' H
79" [2007MM] FOR 8' H
67" [1702MM] FOR 7' H
55" [1397MM] FOR 6' H
43" [1092MM] FOR 5' H
31" [787MM] FOR 4' H

6" [152MM]

BASE-PLATE (OPTIONAL)



FENCE -RAIL

4 EACH X 16 MM DIA
HOLES-FOR ANCHORS

POST

152MM X 152MM X
6.35MM BASE-PLATE
CONCRETE

MATERIAL SPECIFICATIONS:

ARMOUR-SHIELD™
BY MEDALLION FENCE

PROTECTED BY




OPTIONAL POST CAPS

PYRAMID




BALL




SPIRAL

SWIVEL BRACKET



MULTI-FUNCTIONAL
SWIVEL BRACKET



WOOD/MASONRY SWIVEL
BRACKET

SPECIFICATIONS

TUBE COMPOSITION - POSTS , RAILS & PICKETS

- MINIMUM YIELD STRENGTH: 45 KSI (310 MPA)
- MINIMUM TENSILE STRENGTH: 55 KSI (380 MPA)
- ASTM A787 (TUBE)
- TUBE MANUFACTURED FROM PRE-COATED ALUMINUM-ZINC COATED STEEL WITH COATING DESIGNATION AZ50 CONFORMING TO ASTM A792/A792M

MATERIAL DIMENSIONS

PICKET	1" x 1" (25mm x 25mm) 16GA
RAILS	2-1/2" x 1-1/2" (64mm x 38mm) 16 GA
POSTS REGULAR or BASE-PLATED	3" x 3" [76mm x 76mm] 11 GA or 14 GA
OPTIONAL POST REGULAR or BASE-PLATED	4" x 4" (102mmx102mm) 11 GA
UPRIGHTS	2" x 2" [51mm x 51mm] 14GA

WELDS	Stainless Steel Mig Weld
FITTINGS	12 Gauge Stamp Forged Finish as below
FITTING FASTENERS	JS1000 Plated Finish as below
OPTIONAL FASTENER	Tamper Proof Nuts

FINISH

GRADE	Super Durable Polyester Powder Coat
OPTIONAL PRIMER	Zinc Rich Epoxy Powder Coat
OPTIONAL PRIMER (2)	E-Coat
STANDARD COLOUR	SEMI-GLOSS - BLACK
OTHER COLOURS	Green, Brown, White, Antique Silver
CUSTOM COLOURS	Per Specifications

STANDARD HEIGHTS	4' 1219MM	5' 1524MM	6' 1892MM	7' 2134MM	8' 2438MM	9' 2743MM	10' 3048MM
	Custom heights are available (upon request)						

STANDARD GATES	Passage, Double Entry, Cantilever
----------------	-----------------------------------

STANDARD POST SETTING & PANEL WIDTH

FOR FENCE HEIGHTS	PANEL WIDTH	POST SPACING [OPENING]
Up to 6' [1829mm]	88 3/4" [2255MM]	91 1/2" [2324MM]
Over 6' [1829mm]	88 3/4" [2255MM]	91 1/2" [2324MM]