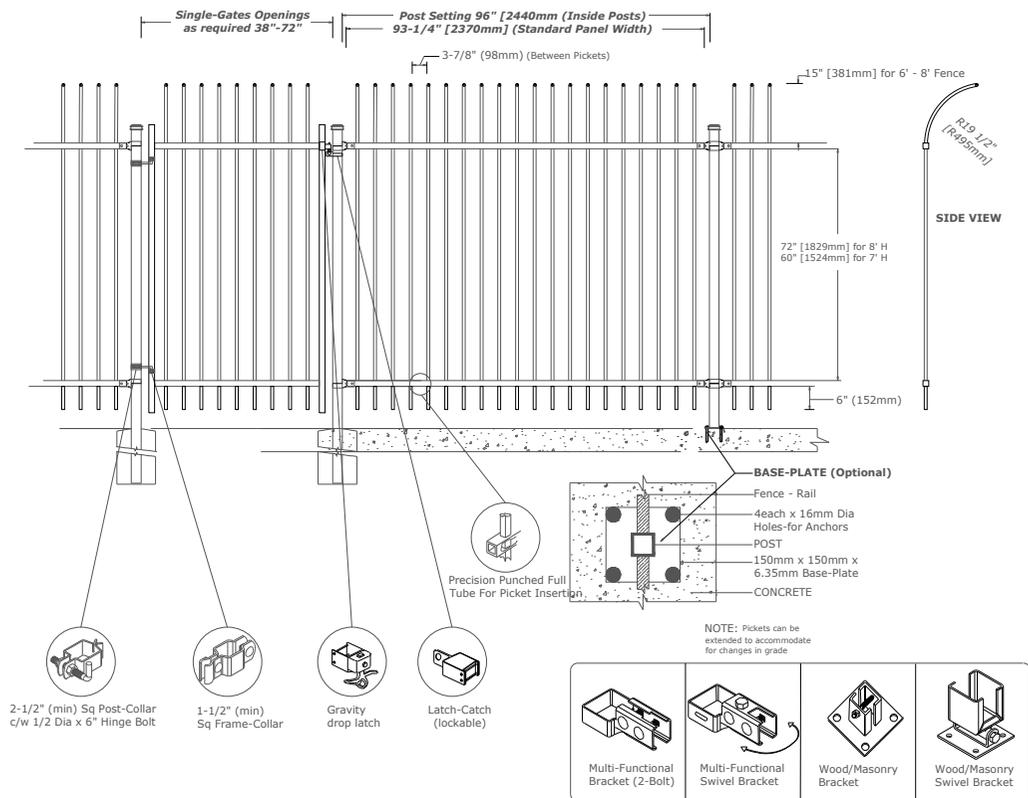# Medallion Fence

10651 KEELE STREET
MAPLE, ONTARIO L6A 3Y9
(T) 905-832-2922 || 1-800-794-1564 || (F) 905-832-1564
info@medallionfence.com || www.medallionfence.com

Style:
GUARDIAN/75

Series:
OXFORD™

SPECIFICATIONS

TUBE COMPOSITION - POSTS , RAILS & PICKETS

Coated Cold Formed ERW Tubing

- With a coating designation being a minimum protective coating weight of 275gm/m² both interior and exterior
- Top coat consisting of a chromium-free phosphate conversion coating
- Coating conforming to ASTM A1046 for hot dip coatings comprising of Zinc, Aluminum and Magnesium
- ERW tube conforming to ASTM A787 Type 6
- Minimum Yield Strength 207 MPa and Minimum Tensile Strength 290 MPa Weld seams mill re-metalized

MATERIAL DIMENSIONS

PICKET	3/4" x 3/4" (19mm x 19mm) 18 GA
RAILS	1-1/2" x 1-1/2" (38mm x 38mm) 16 GA
POSTS REGULAR or BASE-PLATED	2-1/2" x 2-1/2" (64mm x 64mm) 16 GA or 14 GA
OPTIONAL POST(1) REGULAR or BASE-PLATED	3" (76mm) Sq./4" (102mm) Sq 14 GA or 11 GA
OPTIONAL POST(2) REGULAR or BASE-PLATED	HSS 3" (76mm) Sq./4" (102mm) Sq./6" (152mm) Sq

WELDS	Stainless Steel Mig Weld

FITTINGS	12 Gauge Stamp Forged Finish as below
FITTING FASTENERS	JS1000 Plated Finish as below
OPTIONAL FASTENER	Tamper Proof Nuts

FINISH

GRADE	Super Durable Polyester Powder Coat	
OPTIONAL PRIMER	Zinc Rich Epoxy Powder Coat	
STANDARD COLOUR	SEMI-GLOSS - BLACK	
OTHER COLOURS	Green, Brown, White, Antique Silver	
CUSTOM COLOURS	Per Specifications	
STANDARD HEIGHTS	7' 2134mm	8' 2438mm
	Custom heights are available (upon request)	
STANDARD GATES	Passage, Double Entry, Cantilever	

Single-Gates Openings as required 38"-72"

Post Setting 96" [2440mm (Inside Posts)
93-1/4" [2370mm] (Standard Panel Width)

3-7/8" (98mm) (Between Pickets)

15" [381mm] for 6' - 8' Fence

R19 1/2" [R495mm]

SIDE VIEW

72" [1829mm] for 8' H
60" [1524mm] for 7' H

6" (152mm)

BASE-PLATE (Optional)
Fence - Rail
4each x 16mm Dia Holes-for Anchors
POST
150mm x 150mm x 6.35mm Base-Plate
CONCRETE

Precision Punched Full Tube For Picket Insertion

NOTE: Pickets can be extended to accommodate for changes in grade

2-1/2" (min) Sq Post-Collar c/w 1/2 Dia x 6" Hinge Bolt

1-1/2" (min) Sq Frame-Collar

Gravity drop latch

Latch-Catch (lockable)

Multi-Functional Bracket (2-Bolt)

Multi-Functional Swivel Bracket

Wood/Masonry Bracket

Wood/Masonry Swivel Bracket

MATERIAL SPECIFICATIONS:

ARMOUR-SHIELD™
BY MEDALLION FENCE

PROTECTED BY

ARMOUR-SHIELD

PICKET DETAIL

Conventional Arrow

OPTIONAL POST CAPS

Picket

PYRAMID

BALL

SPIRAL