



Medallion Fence


10651 KEELE STREET
MAPLE, ONTARIO L6A 3Y9
(T) 905-832-2922 || 1-800-794-1564 || (F) 905-832-1564
info@medallionfence.com || www.medallionfence.com

Medallion Fence

STYLE:
IMPERIAL

SERIES:
OXFORD 75™

SINGLE-GATES OPENINGS
AS REQUIRED 38"-72"
STANDARD.[50"]

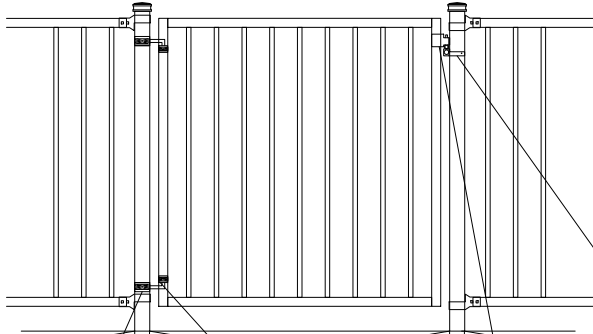

2-1/2" SQ POST-COLLAR
C/W 1/2 DIA X 4"
HINGE BOLT


1-1/2" SQ
FRAME-COLLAR

GRAVITY
DROP LATCH

LATCH-CATCH
(LOCKABLE)


STANDARD POST SETTING - 96" [2438MM]
STANDARD PANEL WIDTH - 93 1/4" [2369MM]

2 5/16" [59MM] 3 7/8" [98MM][BETWEEN PICKETS] 2 5/16" [59MM]

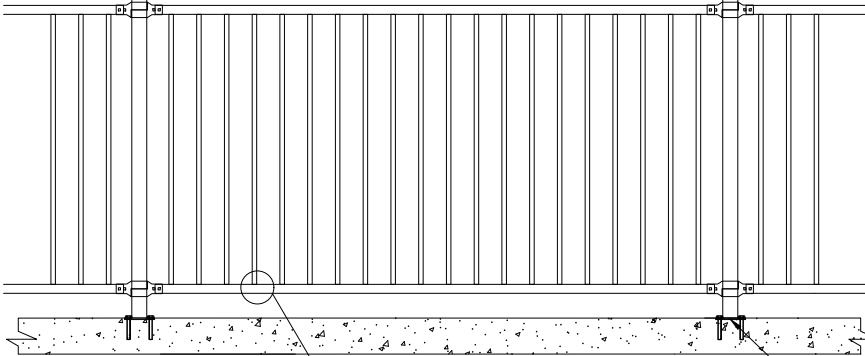


PRECISION PUNCHED FULL
TUBE FOR PICKET INSERTION

BASE-PLATE (OPTIONAL)

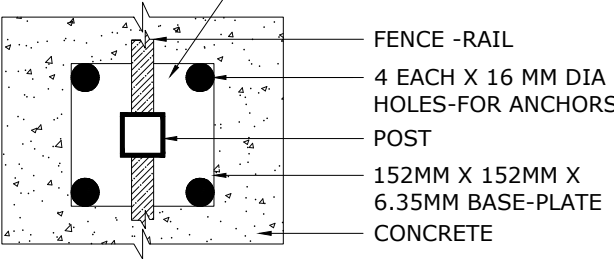

DOUBLE-GATES OPENINGS AS
REQUIRED 74"-240" STANDARD.[100"]

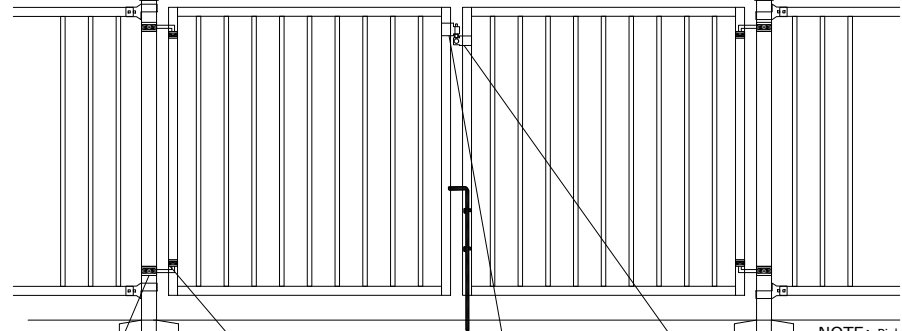

93" [2362MM] FOR 8' H
81" [2057MM] FOR 7' H
69" [1752MM] FOR 6' H
57" [1448MM] FOR 5' H
45" [1143MM] FOR 4' H

NOTE: Pickets can be
extended to accommodate
for changes in grade


2-1/2" SQ POST-COLLAR
C/W 1/2 DIA X 4"
HINGE BOLT

1-1/2" SQ
FRAME-COLLAR

GRAVITY
DROP LATCH

LATCH-CATCH
(LOCKABLE)

PROTECTED BY



ARMOUR-SHIELD™

MATERIAL SPECIFICATIONS:

ARMOUR-SHIELD™
BY MEDALLION FENCE

OPTIONAL POST CAPS



PYRAMID




BALL




SPIRAL

SWIVEL BRACKET



MULTI-FUNCTIONAL
SWIVEL BRACKET



WOOD/MASONRY SWIVEL
BRACKET

SPECIFICATIONS

TUBE COMPOSITION - POSTS , RAILS & PICKETS

- MINIMUM YIELD STRENGTH: 45 KSI (310 MPA)
- MINIMUM TENSILE STRENGTH: 55 KSI (380 MPA)
- ASTM A787 (TUBE)
- TUBE MANUFACTURED FROM PRE-COATED ALUMINUM-ZINC COATED STEEL WITH COATING DESIGNATION AZ50 CONFORMING TO ASTM A792/A792M

MATERIAL DIMENSIONS

PICKET	3/4" x 3/4" (19mm x 19mm) 18 GA
RAILS	1-1/2" x 1-1/2" (38mm x 38mm) 16 GA
POSTS REGULAR or BASE-PLATED	2-1/2" x 2-1/2" (64mm x 64mm) 16 GA or 14 GA
OPTIONAL POST REGULAR or BASE-PLATED	SCH 40 HDG 3" (76mm) Sq./4" (102mm) Sq 14 GA or 11 GA
UPRIGHTS	1-1/2" x 1-1/2" (38mm x 38mm) 16 GA or 14 GA

WELDS	Stainless Steel Mig Weld
FITTINGS	12 Gauge Stamp Forged Finish as below
FITTING FASTENERS	JS1000 Plated Finish as below
OPTIONAL FASTENER	Tamper Proof Nuts

FINISH

GRADE	Super Durable Polyester Powder Coat
OPTIONAL PRIMER	Zinc Rich Epoxy Powder Coat
OPTIONAL PRIMER (2)	E-Coat
STANDARD COLOUR	SEMI-GLOSS - BLACK
OTHER COLOURS	Green, Brown, White, Antique Silver
CUSTOM COLOURS	Per Specifications

STANDARD HEIGHTS	4' 1219mm	5' 1524mm	6' 1892mm	7' 2134mm	8' 2438mm
	Custom heights are available (upon request)				

STANDARD GATES	Passage, Double Entry, Cantilever
----------------	-----------------------------------

STANDARD POST SETTING & PANEL WIDTH

FOR FENCE HEIGHTS	PANEL WIDTH	POST SPACING [OPENING]
Up to 6' [1829mm]	93 1/4" [2369MM]	96" [2438MM]
Over 6' [1829mm]	93 1/4" [2369MM]	96" [2438MM]