



Medallion Fence


10651 KEELE STREET
 MAPLE, ONTARIO L6A 3Y9
 (T) 905-832-2922 || 1-800-794-1564 || (F) 905-832-1564
 info@medallionfence.com || www.medallionfence.com

Medallion Fence

STYLE:
ARISTOCRAT-DR-REP-AL


SERIES:
HAWKSTON RP™

SINGLE-GATES OPENINGS
 AS REQUIRED 38"-72"
 STANDARD .[56"]

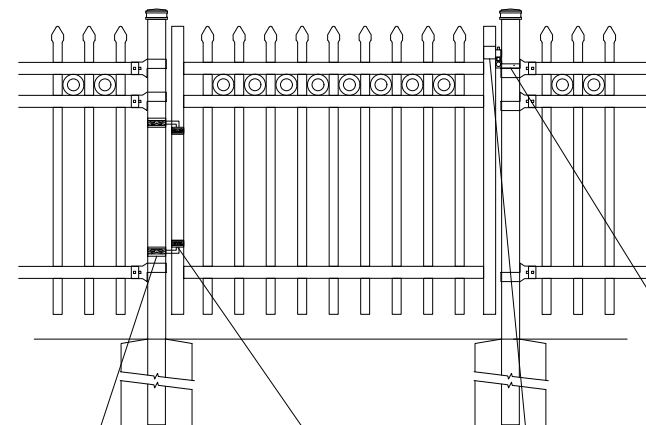

- 3" SQ POST-COLLAR
C/W 1/2 DIA X 4"
HINGE BOLT
- 2" SQ
FRAME-COLLAR
- GRAVITY
DROP LATCH
- LATCH-CATCH
(LOCKABLE)


STANDARD POST SETTING - 93" [2362MM]
 STANDARD PANEL WIDTH - 90" [2286MM]
 3 3/4" [95MM] [BETWEEN PICKETS]

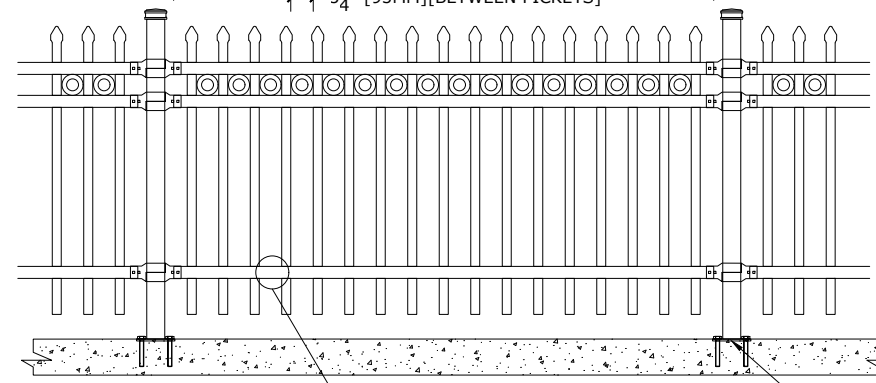

- 6" [152MM]
- 3 1/2" [89MM]
- 98-1/2" [2502 mm] for 10' H
- 86-1/2" [2197 mm] for 9' H
- 74-1/2" [1892 mm] for 8' H
- 62-1/2" [1589 mm] for 7' H
- 50-1/2" [1283 mm] for 6' H
- 38-1/2" [978 mm] for 5' H
- 26 1/2" [673MM] FOR 4' H
- 6" [152MM]


- PRECISION PUNCHED FULL
TUBE FOR PICKET INSERTION

BASE-PLATE (OPTIONAL)

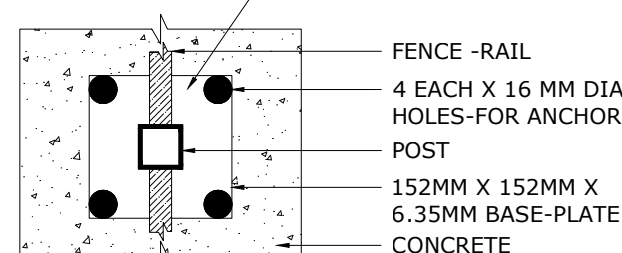

- FENCE -RAIL
- 4 EACH X 16 MM DIA
HOLES-FOR ANCHORS
- POST
- 152MM X 152MM X
6.35MM BASE-PLATE
- CONCRETE

DOUBLE-GATES OPENINGS AS
 REQUIRED 74"-240" STANDARD .[112"]

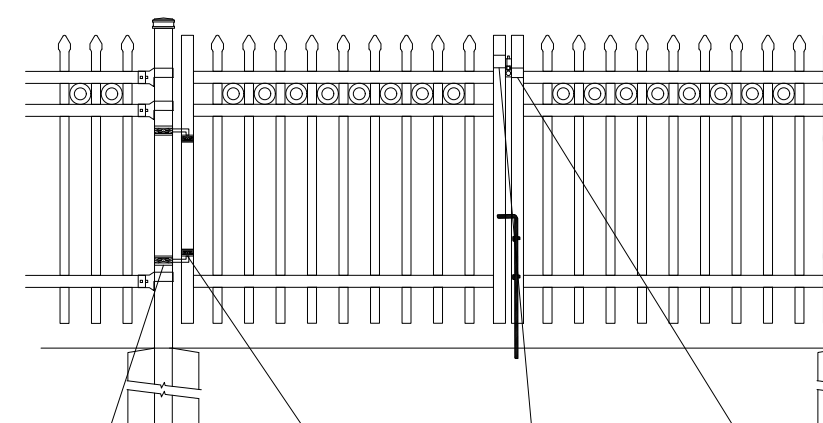

- 3" SQ POST-COLLAR
C/W 1/2 DIA X 4"
HINGE BOLT
- 2" SQ
FRAME-COLLAR
- GRAVITY
DROP LATCH
- LATCH-CATCH
(LOCKABLE)

- 6" [152MM]
- 3 1/2" [89MM]
- 98-1/2" [2502 mm] for 10' H
- 86-1/2" [2197 mm] for 9' H
- 74-1/2" [1892 mm] for 8' H
- 62-1/2" [1589 mm] for 7' H
- 50-1/2" [1283 mm] for 6' H
- 38-1/2" [978 mm] for 5' H
- 26 1/2" [673MM] FOR 4' H
- 6" [152MM]

NOTE: Pickets can be extended to accommodate for changes in grade

OPTIONAL PICKET DESIGNS

MAPLE LEAF

ARROW

BRACKET

MULTI-FUNCTIONAL BRACKET

WOOD/MASONRY BRACKET

OPTIONAL POST CAPS

PYRAMID

BALL

SPIRAL

SWIVEL BRACKET

MULTI-FUNCTIONAL SWIVEL BRACKET

WOOD/MASONRY SWIVEL BRACKET

MATERIAL SPECIFICATIONS:
 ALU-TUFF™
 BY MEDALLION FENCE



SPECIFICATIONS

TUBE COMPOSITION - POSTS , RAILS & PICKETS

- HIGH-STRENGTH EXTRUDED ALUMINUM ALLOY (6061-T4 & 6061-T6 TEMPERS)
- ULTIMATE TENSILE STRENGTH: ≈ 290 MPA (T4), ≈ 339 MPA (T6)
- YIELD STRENGTH: ≈ 210 MPA (T4), ≈ 317 MPA (T6)
- ELONGATION: ≈ 8%-16% (T6), UP TO ~16%+ (T4) DEPENDING ON THICKNESS

MATERIAL DIMENSIONS

PICKET	1-1/2" x 3/4" (38mm x 19mm) .065 Wall
RAILS	2" x 2" [50mmx50mm] .125 Wall
POSTS REGULAR or BASE-PLATED	3" x 3" [76mm x 76mm] .188 Wall
OPTIONAL POST REGULAR or BASE-PLATED	Larger profiles available - contact Medallion Fence
UPRIGHTS	2" x 2" [50mmx50mm] .188 Wall

WELDS	Aluminum Mig Weld
FITTINGS	12 Gauge Stamp Forged Finish as below
FITTING FASTENERS	JS1000 Plated Finish as below
OPTIONAL FASTENER	Tamper Proof Nuts

FINISH

GRADE	Super Durable Polyester Powder Coat
OPTIONAL PRIMER	Zinc Rich Epoxy Powder Coat
OPTIONAL PRIMER (2)	E-Coat
STANDARD COLOUR	SEMI-GLOSS - BLACK
OTHER COLOURS	Green, Brown, White, Antique Silver
CUSTOM COLOURS	Per Specifications

STANDARD HEIGHTS	4' 1219MM	5' 1524MM	6' 1892MM	7' 2134MM	8' 2438MM	9' 2743MM	10' 3048MM
	Custom heights are available (upon request)						

STANDARD GATES	Passage, Double Entry, Cantilever
----------------	-----------------------------------

STANDARD POST SETTING & PANEL WIDTH

FOR FENCE HEIGHTS	PANEL WIDTH	POST SPACING [OPENING]
Up to 6' [1829mm]	90" [2286MM]	93" [2362MM]
Over 6' [1829mm]	90" [2286MM]	93" [2362MM]