



Medallion Fence



10651 KEELE STREET
MAPLE, ONTARIO L6A 3Y9
(T) 905-832-2922 || 1-800-794-1564 || (F) 905-832-1564
info@medallionfence.com || www.medallionfence.com

Medallion Fence

STYLE:
STANTON SDEP -AL

SERIES:
WELLINGTON™


SINGLE-GATES OPENINGS
AS REQUIRED 36", 48"
OR 60" STANDARD

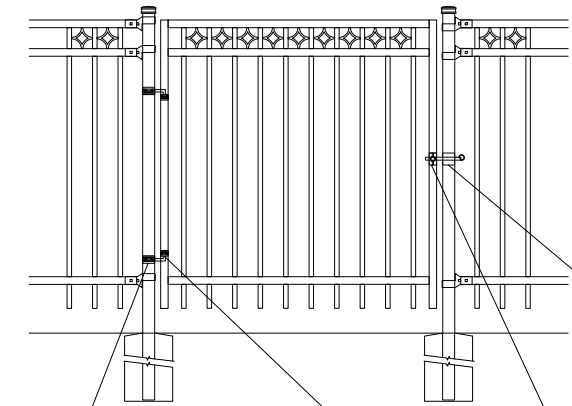


2" SQ POST-COLLAR
C/W 1/2 DIA X 4"
HINGE BOLT



1-1/4"SQ
FRAME-COLLAR




1-1/4" SQ
FINGER-LATCH



2" SQ.
GRAVITY-CATCH
(LOCKABLE)

STANDARD POST SETTING - 96 1/2" [2452MM]
STANDARD PANEL WIDTH - 94 1/2" [2400MM]


3 1/2" [89MM][BETWEEN PICKETS]

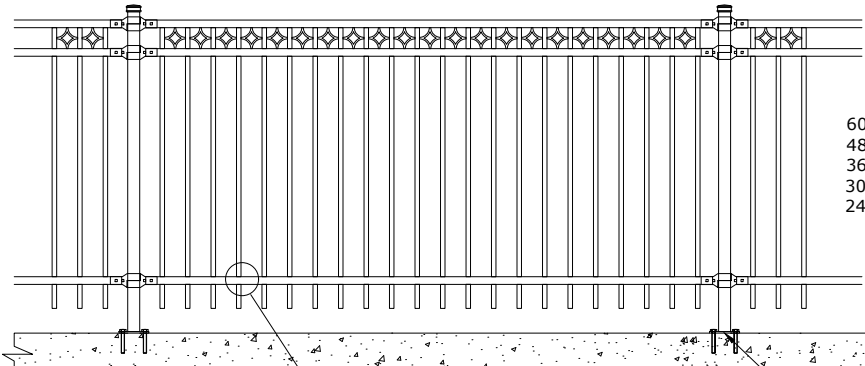

60-3/4" [1543MM] FOR 72" H
48-3/4" [1238MM] FOR 60" H
36 3/4" [933MM] FOR 48" H
30-3/4" [781MM] FOR 42" H
24-3/4" [629MM] FOR 36" H


3 1/2" [89MM]

4" [102MM]



PRECISION PUNCHED FULL
TUBE FOR PICKET INSERTION

BASE-PLATE (OPTIONAL)





FENCE -RAIL

4 EACH X 16 MM DIA
HOLES-FOR ANCHORS


POST

125MM X 125MM X
6.35MM BASE-PLATE
CONCRETE


DOUBLE-GATES OPENINGS AS
REQUIRED 72", 96" OR 120" STANDARD

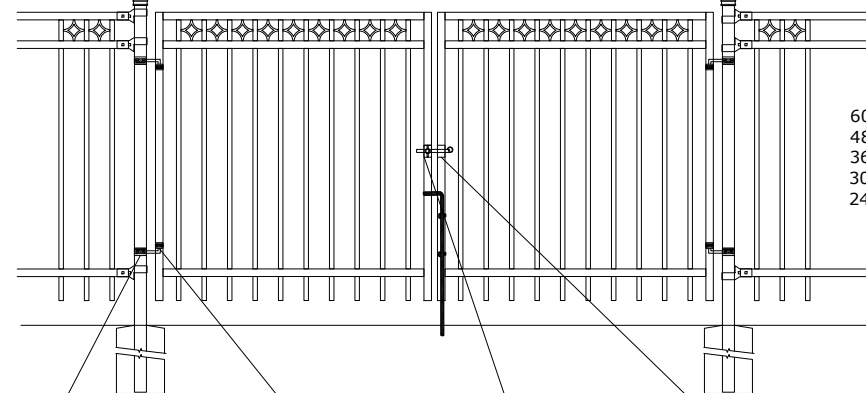


2" SQ POST-COLLAR
C/W 1/2 DIA X 4"
HINGE BOLT



1-1/4"SQ
FRAME-COLLAR



1-1/4" SQ
FINGER-LATCH



2" SQ.
GRAVITY-CATCH
(LOCKABLE)

3 1/2" [89MM]

60-3/4" [1543MM] FOR 72" H
48-3/4" [1238MM] FOR 60" H
36 3/4" [933MM] FOR 48" H
30-3/4" [781MM] FOR 42" H
24-3/4" [629MM] FOR 36" H

4" [102MM]

PROTECTED BY



MATERIAL SPECIFICATIONS:

ALU-TUFF™
BY MEDALLION FENCE


OPTIONAL POST CAPS

PYRAMID


BALL

SPIRAL

BRACKET




MULTI-FUNCTIONAL
BRACKET




WOOD/MASONRY BRACKET

SWIVEL BRACKET



SWIVEL BRACKET



WOOD/MASONRY SWIVEL
BRACKET

SPECIFICATIONS

TUBE COMPOSITION - POSTS , RAILS & PICKETS

- HIGH-STRENGTH EXTRUDED ALUMINUM ALLOY (6061-T4 & 6061-T6 TEMPER)
- ULTIMATE TENSILE STRENGTH: ≈ 290 MPA (T4), ≈ 339 MPA (T6)
- YIELD STRENGTH: ≈ 210 MPA (T4), ≈ 317 MPA (T6)
- ELONGATION: ≈ 8%-16% (T6), UP TO ~16%+ (T4) DEPENDING ON THICKNESS

MATERIAL DIMENSIONS

PICKET	3/4" x 3/4" (19mm x 19mm) .065WALL
RAILS	1-1/4" x 1-1/4" (32mm x 32mm) .080 Wall
POSTS REGULAR or BASE-PLATED	2" x 2" (51mm x 51mm) .125 Wall
OPTIONAL POST REGULAR or BASE-PLATED	2-1/2" x 2-1/2" (64mmx64mm) .125 Wall
UPRIGHTS	1-1/4" x 1-1/4" (32mm x 32mm) .125 Wall

WELDS	Aluminum Mig Weld
FITTINGS	14 Gauge Stamp Forged Finish as below
FITTING FASTENERS	JS1000 Plated Finish as below
OPTIONAL FASTENER	Tamper Proof Nuts

FINISH

GRADE	Super Durable Polyester Powder Coat
OPTIONAL PRIMER	Zinc Rich Epoxy Powder Coat
OPTIONAL PRIMER (2)	E-Coat
STANDARD COLOUR	SEMI-GLOSS - BLACK
OTHER COLOURS	Green, Brown, White, Antique Silver
CUSTOM COLOURS	Per Specifications

STANDARD HEIGHTS	36" 914mm	42" 1067mm	48" 1219mm	60" 1524mm	72" 1892mm
	Custom heights are available (upon request)				

STANDARD GATES	Passage, Double Entry, Cantilever
----------------	-----------------------------------

STANDARD POST SETTING & PANEL WIDTH

FOR FENCE HEIGHTS	PANEL WIDTH	POST SPACING [OPENING]
Up to 6' [1829mm]	94 1/2" [2400MM]	96 1/2" [2452 MM]
Over 6' [1829mm]	NA	