

OPTIONAL CAST FINIAL Fleur Des Lis (FF)







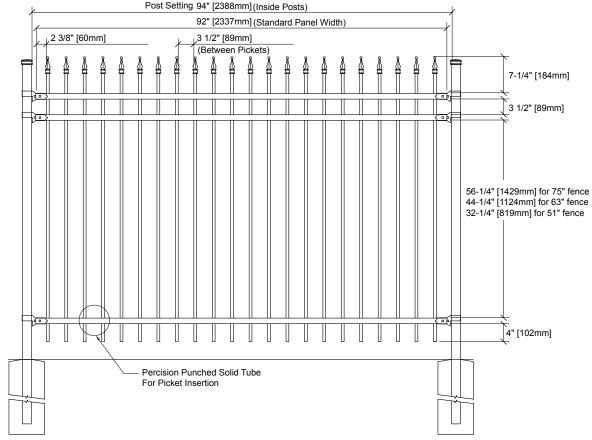

SPECIFICATIONS

TUBE COMPOSITION - POSTS, RAILS & PICKETS

ALLIED FLO-COAT® Triple Coated Cold Form Tubing

- Cold Formed and Quenched for High Yield and Tensile Strength
- Interior Coating Including Weld Seam with 90% Organic Zinc
- Exterior Coating Including Weld Seam with 99% Pure Zinc
- Passivation of Tube with a Chromate Conversion Coating
- Protective Sealer / Primer with Clear Organic Polymer

MATERIAL DIMENSION	NS			
PICKETS	5/8" × 5/8" (16mm × 16mm) 18 GA			
RAILS	1-1/4" × 1-1/4" (32mm × 32mm) 16 GA			
POSTS	2" × 2" (51mm × 51mm) 14 GA			
OPTIONAL POSTS(1)	2" × 2" (51mm × 51mm) 11 GA			
OPTIONAL POSTS(2)	2-1/2" × 2-1/2" (64mm × 64mm) 14 GA			
WELDS	Stainless Steel Mig Weld			
FITTINGS	14 Gauge Stamp Forged Finish as below			
FITTING FASTENERS	JS1000 Plated Finish as below			
OPTIONAL	Tamper Proof Nuts			
FASTENER				
FINISH				
GRADE	Super Durable Polyester Powder Coat			
OPTIONAL PRIMER	Zinc Rich Epoxy Powder Coat			
STANDARD COLOUR	Gloss Black			
OTHER COLOURS	Green, Brown, White, Antique Silver			
CUSTOM COLOURS	Per Specifications			
CTANDADD	F 4 !!	60"	75"	
STANDARD	51"	63"	75"	

STANDARD	51"	63"	75"
HEIGHTS	[1295mm]	1600mm	1905mm

STANDARD GATES Passage, Double Entry, Canatilever



MEDALLION FENCE LTD

10651 KEELE STREET
MAPLE, ONTARIO L6A 3Y9
(T) 905-832-2922 || 1-800-794-1564 || (F) 905-832-1564 info@medallionfence.com || www.medallionfence.com

MATERIAL SPECIFICATIONS:

ARMOUR-SHIELD™ BY MEDALLION FENCE

CAVALIER SF-DR

SERIES:

4000

DATE: MM/DD/YYYY **06/01/2012**