

PROTECTED BY



ARMOUR-SHIELD™

SPECIFICATIONS

TUBE COMPOSITION - POSTS, RAILS & PICKETS

- ALLIED FLO-COAT®** Triple Coated Cold Form Tubing
- Cold Formed and Quenched for High Yield and Tensile Strength
 - Interior Coating Including Weld Seam with 90% Organic Zinc
 - Exterior Coating Including Weld Seam with 99% Pure Zinc
 - Passivation of Tube with a Chromate Conversion Coating
 - Protective Sealer / Primer with Clear Organic Polymer

MATERIAL DIMENSIONS

PICKETS	5/8" × 5/8" (16mm × 16mm) 18 GA
RAILS	1-1/4" × 1-1/4" (32mm × 32mm) 16 GA
POSTS	2" × 2" (51mm × 51mm) 14 GA
OPTIONAL POSTS(1)	2" × 2" (51mm × 51mm) 11 GA
OPTIONAL POSTS(2)	2-1/2" × 2-1/2" (64mm × 64mm) 14 GA

WELDS	Stainless Steel Mig Weld
--------------	--------------------------

FITTINGS	14 Gauge Stamp Forged Finish as below
FITTING FASTENERS	JS1000 Plated Finish as below
OPTIONAL FASTENER	Tamper Proof Nuts

FINISH	
GRADE	Super Durable Polyester Powder Coat
OPTIONAL PRIMER	Zinc Rich Epoxy Powder Coat
STANDARD COLOUR	Gloss Black
OTHER COLOURS	Green, Brown, White, Antique Silver
CUSTOM COLOURS	Per Specifications

STANDARD HEIGHTS	51" [1295mm]	63" 1600mm	75" 1905mm
-------------------------	-----------------	---------------	---------------

STANDARD GATES	Passage, Double Entry, Canatilever
-----------------------	------------------------------------

OPTIONAL CAST FINIAL



Fleur Des Lis (FF)

OPTIONAL POST CAPS




Pyramid



Ball



Spiral

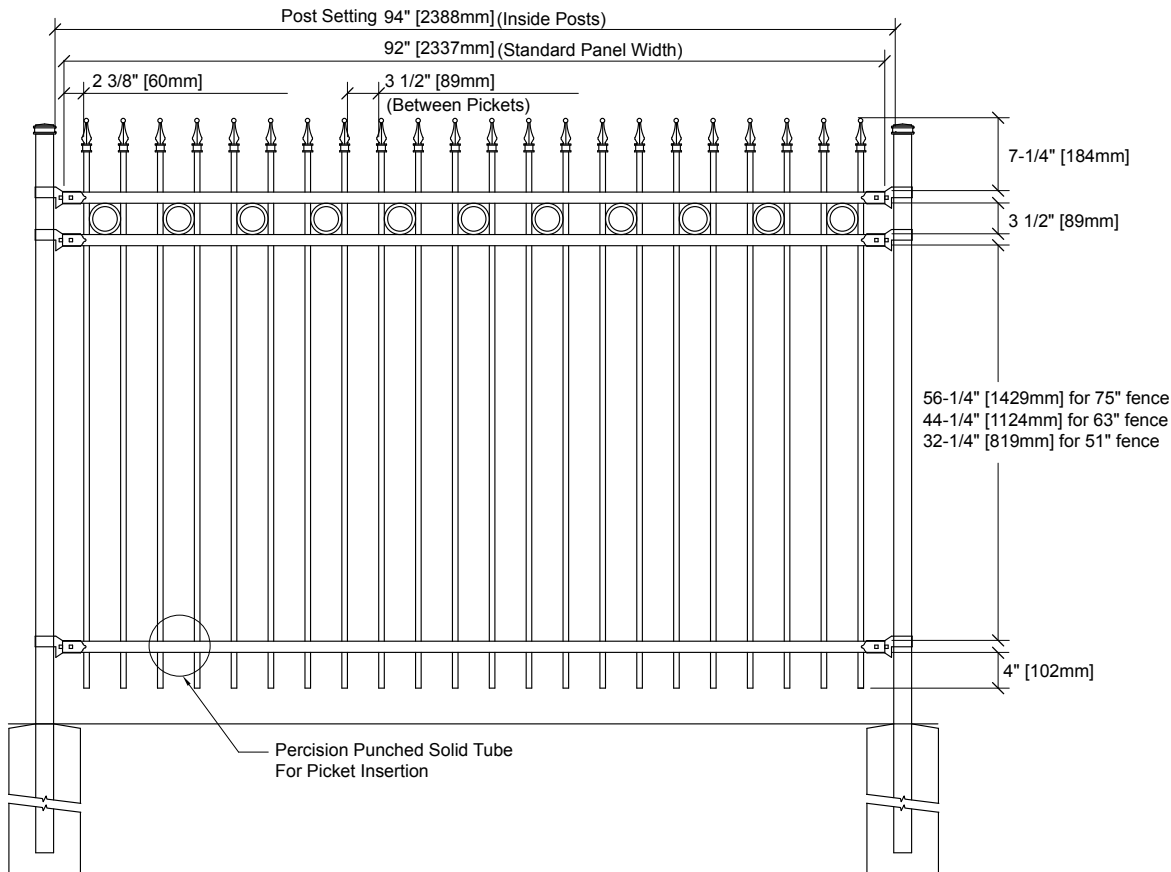

MEDALLION FENCE LTD

10651 KEELE STREET
MAPLE, ONTARIO L6A 3Y9

(T) 905-832-2922 || 1-800-794-1564 || (F) 905-832-1564
info@medallionfence.com || www.medallionfence.com

MATERIAL SPECIFICATIONS:

ARMOUR-SHIELD™ BY MEDALLION FENCE

STYLE:

CAVALIER SF-REO

SERIES:

4000

DATE: MM/DD/YYYY

06/01/2012