



Medallion Fence


10651 KEELE STREET
 MAPLE, ONTARIO L6A 3Y9
 (T) 905-832-2922 || 1-800-794-1564 || (F) 905-832-1564
 info@medallionfence.com || www.medallionfence.com

Style:

CAVALIER-SF

Series:

WELLINGTON™

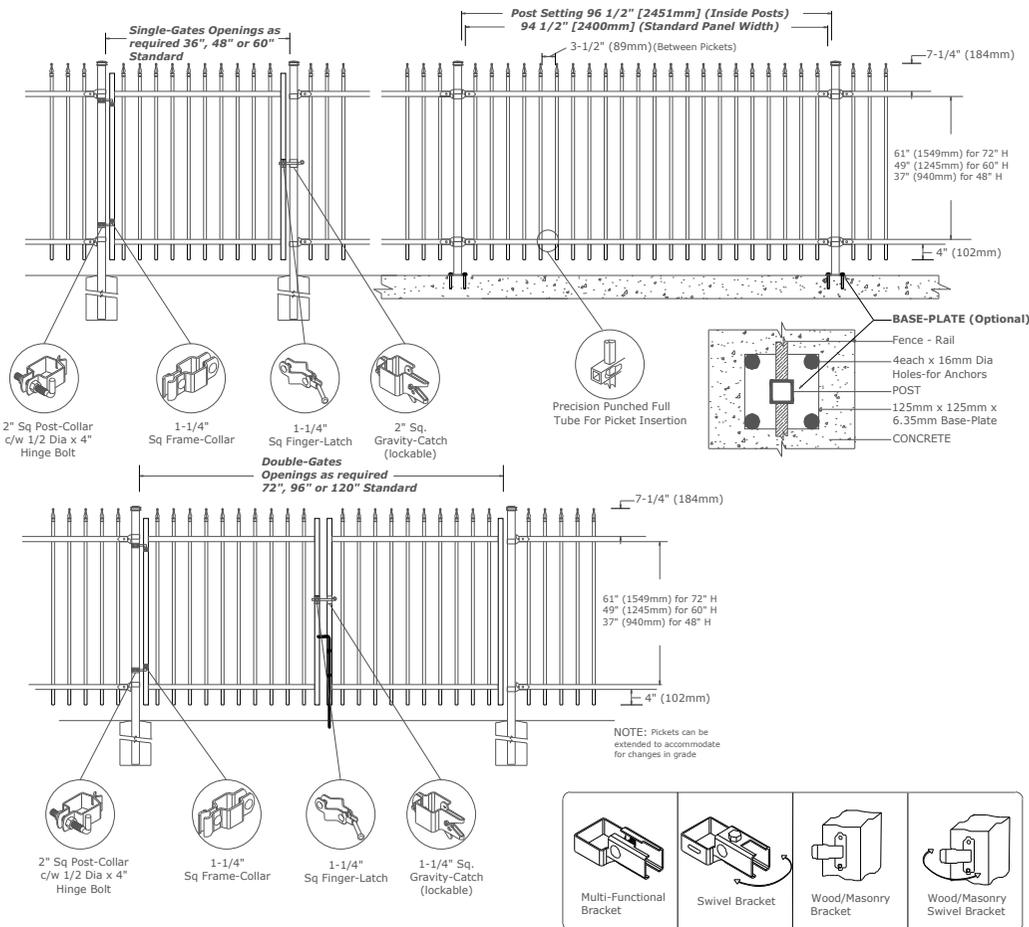

MATERIAL SPECIFICATIONS:

ARMOUR-SHIELD™
 BY MEDALLION FENCE

PROTECTED BY



OPTIONAL CAST FINIAL



Maple Leaf



Fleur Des Lis (FF)

OPTIONAL POST CAPS



PYRAMID



BALL



SPIRAL

SPECIFICATIONS

TUBE COMPOSITION - POSTS, RAILS & PICKETS

Triple Coated Cold Form Tubing

- Cold Formed and Quenched for High Yield and Tensile Strength
- Interior Coating Including Weld Seam with 90% Organic Zinc
- Exterior Coating Including Weld Seam with 99% Pure Zinc
- Passivation of Tube with a Chromate Conversion Coating
- Protective Sealer / Primer with Clear Organic Polymer

MATERIAL DIMENSIONS

PICKET	3/4" x 3/4" (19mm x 19mm) 18 GA
RAILS	1-1/4" x 1-1/4" (32mm x 32mm) 16 GA
POSTS REGULAR or BASE-PLATED	2" x 2" (51mm x 51mm) 14 GA
OPTIONAL POST(1) REGULAR or BASE-PLATED	2" x 2" (51mm x 51mm) 11 GA
OPTIONAL POST(2) REGULAR or BASE-PLATED	2-1/2" x 2-1/2" (64mmx64mm) 14 GA

WELDS	Stainless Steel Mig Weld
-------	--------------------------

FITTINGS	14 Gauge Stamp Forged Finish as below
----------	---------------------------------------

FITTING FASTENERS	JS1000 Plated Finish as below
-------------------	-------------------------------

OPTIONAL FASTENER	Tamper Proof Nuts
-------------------	-------------------

FINISH

GRADE	Super Durable Polyester Powder Coat
OPTIONAL PRIMER	Zinc Rich Epoxy Powder Coat
STANDARD COLOUR	SEMI-GLOSS - BLACK
OTHER COLOURS	Green, Brown, White, Antique Silver
CUSTOM COLOURS	Per Specifications

STANDARD HEIGHTS	51" 1295mm	63" 1600mm	75" 1905mm
	Custom heights are available (upon request)		

STANDARD GATES	Passage, Double Entry, Cantilever
----------------	-----------------------------------