





Medallion Fence

10651 KEELE STREET
 MAPLE, ONTARIO L6A 3Y9
 (T) 905-832-2922 | (F) 1-800-794-1564 | (F) 905-832-1564
 info@medallionfence.com | www.medallionfence.com

Style:
 CAVALIER-DR-SF

Series:
 OXFORD™

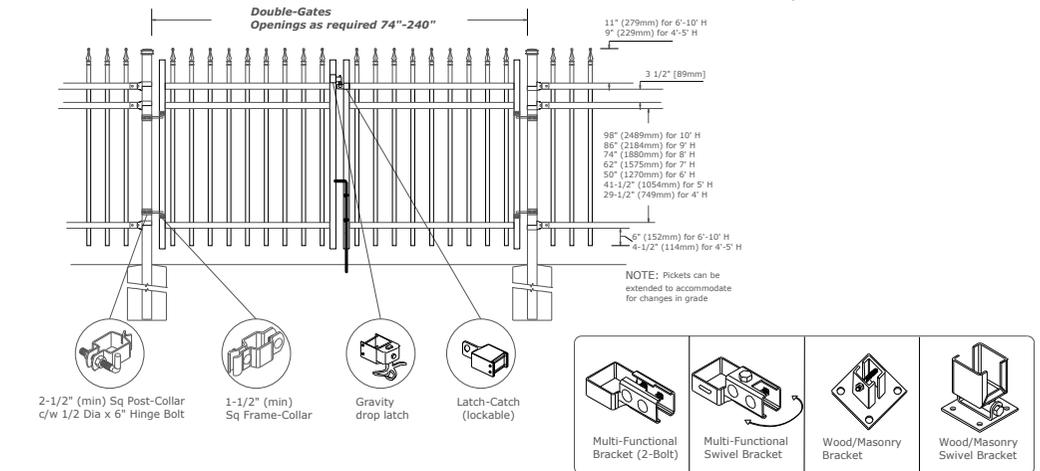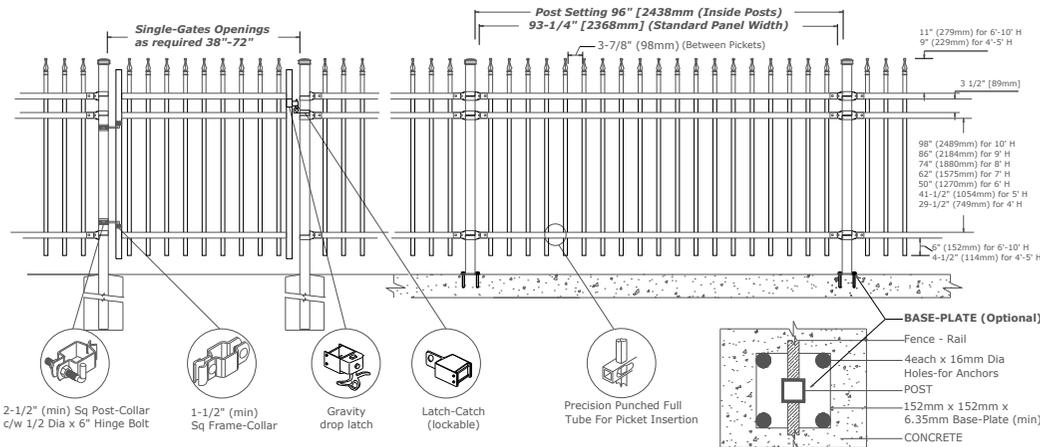

MATERIAL SPECIFICATIONS:
 ARMOUR-SHIELD™
 BY MEDALLION FENCE



OPTIONAL CAST FINIAL



Fleur Des Lis (FF)

OPTIONAL POST CAPS



PYRAMID



BALL



SPIRAL

SPECIFICATIONS

TUBE COMPOSITION - POSTS, RAILS & PICKETS

Coated Cold Formed ERW Tubing

- A minimum protective coating weight of 275gm/m² both interior and exterior
- Top coat consisting of a chromium-free phosphate conversion coating
- Coating conforming to ASTM A1046 for hot dip coatings comprising of Zinc, Aluminum and Magnesium
- ERW tube conforming to ASTM A787 Type 6
- Minimum Yield Strength 207 MPa and Minimum Tensile Strength 290 MPa
- Weld seams mill re-metalized

MATERIAL DIMENSIONS

| | |
|------------------------|---|
| PICKET | 1" x 1" (25mm x 25mm) 16 GA |
| RAILS | 1-1/2" x 1-1/2" (38mm x 38mm) 14 GA |
| POSTS | 2-1/2" x 2-1/2" (64mm x 64mm) 14 GA |
| REGULAR or BASE-PLATED | |
| OPTIONAL POST(1) | 3"(76mm) Sq./4"(102mm) Sq 11 GA or 14 GA |
| REGULAR or BASE-PLATED | |
| OPTIONAL POST(2) | HSS 3" (76mm) Sq./4" (102mm) Sq./6" (152mm) Sq. |
| REGULAR or BASE-PLATED | |

| | |
|--------------|--------------------------|
| WELDS | Stainless Steel Mig Weld |
|--------------|--------------------------|

| | |
|-----------------|---------------------------------------|
| FITTINGS | 12 Gauge Stamp Forged Finish as below |
|-----------------|---------------------------------------|

| | |
|-------------------|-------------------------------|
| FITTING FASTENERS | JS1000 Plated Finish as below |
|-------------------|-------------------------------|

| | |
|-------------------|-------------------|
| OPTIONAL FASTENER | Tamper Proof Nuts |
|-------------------|-------------------|

FINISH

| | |
|-----------------|-------------------------------------|
| GRADE | Super Durable Polyester Powder Coat |
| OPTIONAL PRIMER | Zinc Rich Epoxy Powder Coat |
| STANDARD COLOUR | SEMI-GLOSS - BLACK |
| OTHER COLOURS | Green, Brown, White, Antique Silver |
| CUSTOM COLOURS | Per Specifications |

| | | | | | | | |
|-------------------------|---|-----------------|-----------------|-----------------|-----------------|-----------------|------------------|
| STANDARD HEIGHTS | 4'-3" 1295mm | 5'-3" 1600mm | 6'-3" 1905mm | 7'-3" 2210mm | 8'-3" 2515mm | 9'-3" 2819mm | 10'-3" 3124mm |
| | Custom heights are available (upon request) | | | | | | |

| | |
|----------------|-----------------------------------|
| STANDARD GATES | Passage, Double Entry, Cantilever |
|----------------|-----------------------------------|