







Medallion Fence

10651 KEELE STREET
MAPLE, ONTARIO L6A 3Y9
(T) 905-832-2922 || 1-800-794-1564 || (F) 905-832-1564
info@medallionfence.com || www.medallionfence.com


Medallion Fence

STYLE:
ARISTOCRAT-DR-REP


SERIES:
PRESTON RP™

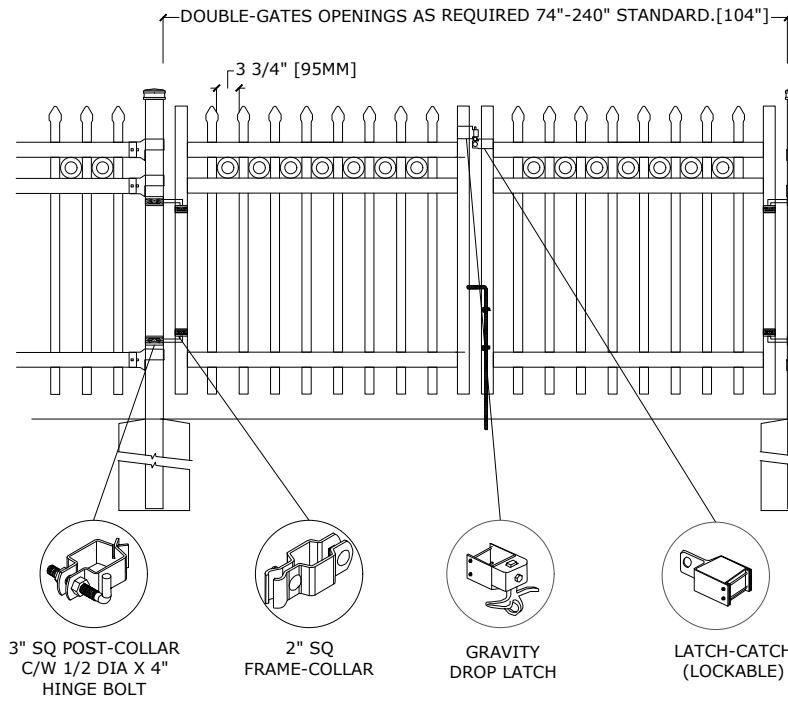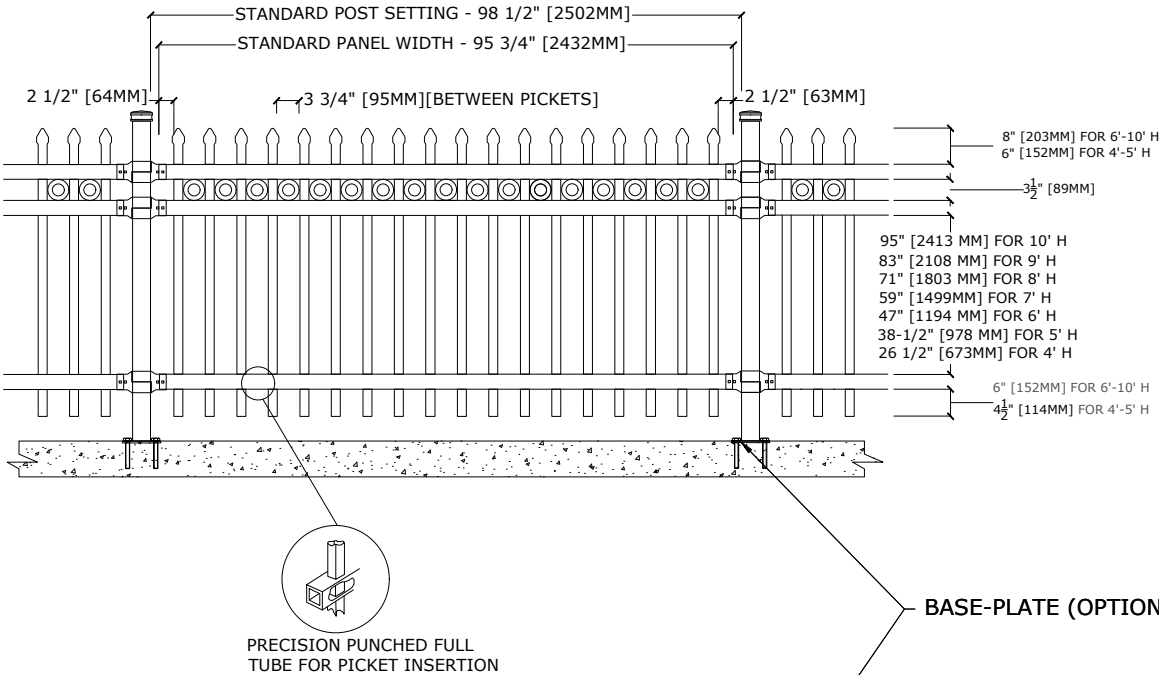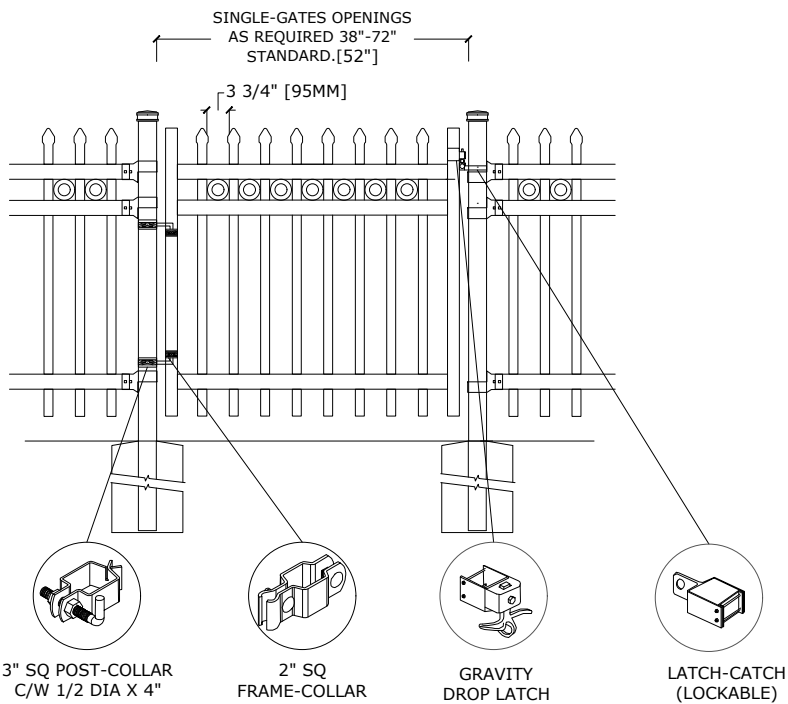

NOTE: Pickets can be extended to accommodate for changes in grade

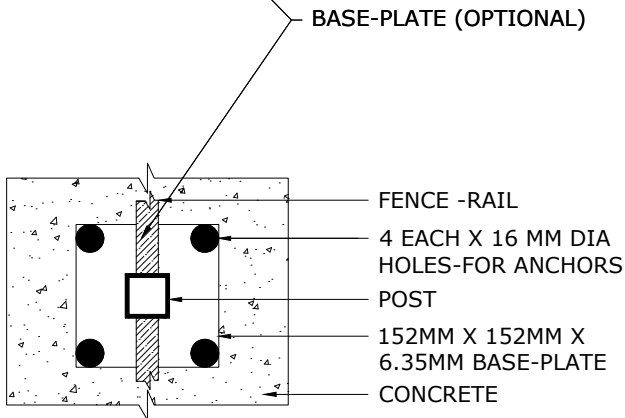

OPTIONAL PICKET DESIGNS




MAPLE LEAF




ARROW

BRACKET



MULTI-FUNCTIONAL BRACKET



WOOD/MASONRY BRACKET


OPTIONAL POST CAPS



PYRAMID




BALL




SPIRAL

SWIVEL BRACKET



MULTI-FUNCTIONAL SWIVEL BRACKET



WOOD/MASONRY SWIVEL BRACKET

MATERIAL SPECIFICATIONS:

ARMOUR-SHIELD™
BY MEDALLION FENCE

PROTECTED BY



ARMOUR-SHIELD™

SPECIFICATIONS

TUBE COMPOSITION - POSTS , RAILS & PICKETS

- MINIMUM YIELD STRENGTH: 45 KSI (310 MPA)
- MINIMUM TENSILE STRENGTH: 55 KSI (380 MPA)
- ASTM A787 (TUBE)
- TUBE MANUFACTURED FROM PRE-COATED ALUMINUM-ZINC COATED STEEL WITH COATING DESIGNATION AZ50 CONFORMING TO ASTM A792/A792M

MATERIAL DIMENSIONS

PICKET	1-1/2" x 3/4" (38mm x 19mm) 16GA
RAILS	2-1/2" x 1-1/2" (64mm x 38mm) 16 GA
POSTS REGULAR or BASE-PLATED	3" x 3" [76mm x 76mm] 14 GA
OPTIONAL POST REGULAR or BASE-PLATED	3" x 3" (76mmx76mm) 11 GA 4" x 4" (102mmx102mm) 11GA
UPRIGHTS	2" x 2" [51mm x 51mm] 14GA

WELDS Stainless Steel Mig Weld

FITTINGS 12 Gauge Stamp Forged Finish as below

FITTING FASTENERS JS1000 Plated Finish as below

OPTIONAL FASTENER Tamper Proof Nuts

FINISH

GRADE Super Durable Polyester Powder Coat

OPTIONAL PRIMER Zinc Rich Epoxy Powder Coat

OPTIONAL PRIMER (2) E-Coat

STANDARD COLOUR SEMI-GLOSS - BLACK

OTHER COLOURS Green, Brown, White, Antique Silver

CUSTOM COLOURS Per Specifications

STANDARD HEIGHTS

4' 1219MM	5' 1524MM	6' 1892MM	7' 2134MM	8' 2438MM	9' 2743MM	10' 3048MM
--------------	--------------	--------------	--------------	--------------	--------------	---------------

Custom heights are available (upon request)

STANDARD GATES Passage, Double Entry, Cantilever

STANDARD POST SETTING & PANEL WIDTH

FOR FENCE HEIGHTS	PANEL WIDTH	POST SPACING [OPENING]
Up to 6' [1829mm]	95 3/4" [2432MM]	98 1/2" [2502MM]
Over 6' [1829mm]	95 3/4" [2432MM]	98 1/2" [2502MM]