





Medallion Fence

10651 KEELE STREET
 MAPLE, ONTARIO L6A 3Y9
 (T) 905-832-2922 | (F) 905-832-1564
 info@medallionfence.com | www.medallionfence.com

Style:
 STANTON/RP

Series:
 PRESTON™

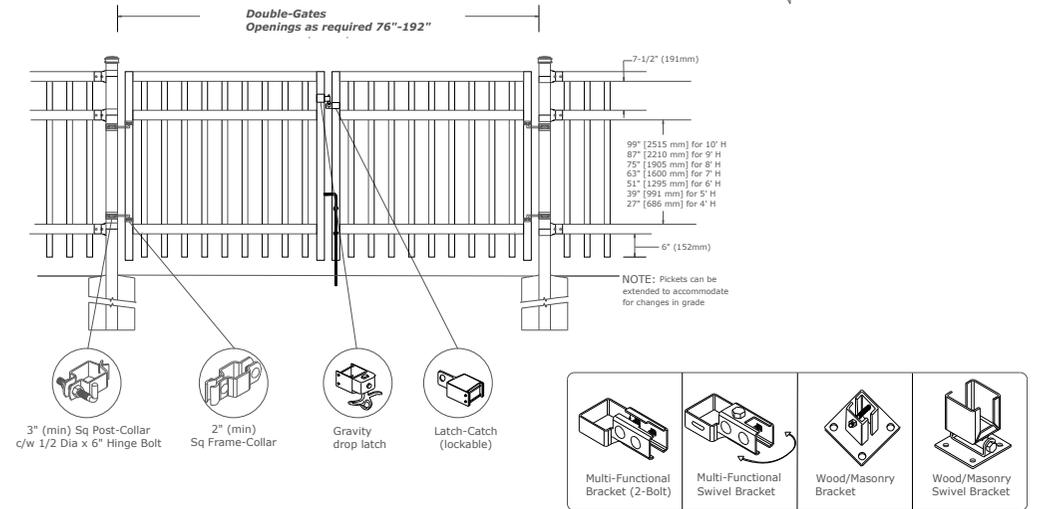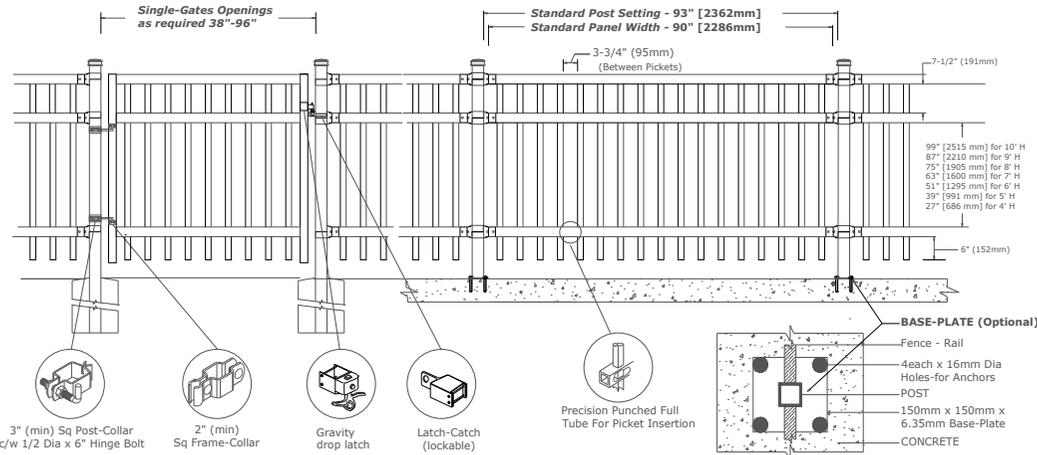

MATERIAL SPECIFICATIONS:
 ARMOUR-SHIELD™
 BY MEDALLION FENCE

PROTECTED BY



ARMOUR-SHIELD

OPTIONAL POST CAPS



PYRAMID



BALL



SPIRAL

SPECIFICATIONS

TUBE COMPOSITION - POSTS, RAILS & PICKETS

Coated Cold Formed ERW Tubing

- With a coating designation being a minimum protective coating weight of 275gm/m² both interior and exterior
- Top coat consisting of a chromium-free phosphate conversion coating
- Coating conforming to ASTM A1046 for hot dip coatings comprising of Zinc, Aluminum and Magnesium
- ERW tube conforming to ASTM A787 Type 6
- Minimum Yield Strength 207 MPa and Minimum Tensile Strength 290 MPa
- Weld seams mill re-metalized

MATERIAL DIMENSIONS

| | |
|--------------------------------------------|--------------------------------------------------------|
| PICKET | 1-1/2" x 3/4" [38mm x 19mm] 16GA |
| RAILS | 2-1/2" x 1-1/2" [64mm x 38mm] 16 GA |
| POSTS | 3" x 3" [76mm x 76mm] 14 GA |
| OPTIONAL POST(1) REGULAR or BASE-PLATED | 3" x 3" (76mmx76mm) 11GA 4" x 4" (102mmx102mm) 11GA |
| WELDS | Stainless Steel Mig Weld |
| FITTINGS | 12 Gauge Stamp Forged Finish as below |
| FITTING FASTENERS | JS1000 Plated Finish as below |
| OPTIONAL FASTENER | Tamper Proof Nuts |

FINISH

| | |
|-----------------|-------------------------------------|
| GRADE | Super Durable Polyester Powder Coat |
| OPTIONAL PRIMER | Zinc Rich Epoxy Powder Coat |
| STANDARD COLOUR | SEMI-GLOSS - BLACK |
| OTHER COLOURS | Green, Brown, White, Antique Silver |
| CUSTOM COLOURS | Per Specifications |

| | | | | | | | |
|------------------|---------------------------------------------|--------------|--------------|--------------|--------------|--------------|---------------|
| STANDARD HEIGHTS | 4' 1219mm | 5' 1524mm | 6' 1892mm | 7' 2134mm | 8' 2438mm | 9' 2743mm | 10' 3048mm |
| | Custom heights are available (upon request) | | | | | | |

| | |
|----------------|-----------------------------------|
| STANDARD GATES | Passage, Double Entry, Cantilever |
|----------------|-----------------------------------|

STANDARD POST SETTING & PANEL WIDTH

| FOR FENCE HEIGHTS | PANEL WIDTH | POST SPACING [OPENING] |
|-------------------|-----------------------------|------------------------|
| Up to 6' [1829mm] | 90" [2286mm] | 93" [2362mm] |
| Over 6' [1829mm] | 90" [2286mm] or as required | |