



Medallion Fence

10651 KEELE STREET
MAPLE, ONTARIO L6A 3Y9
(T) 905-832-2922 || 1-800-794-1564 || (F) 905-832-1564
info@medallionfence.com || www.medallionfence.com


Style:
STERLING-AL

Series:
PRESTON™

SPECIFICATIONS

TUBE COMPOSITION - POSTS, RAILS & PICKETS

Marine Grade Aluminum
o 6061-T6

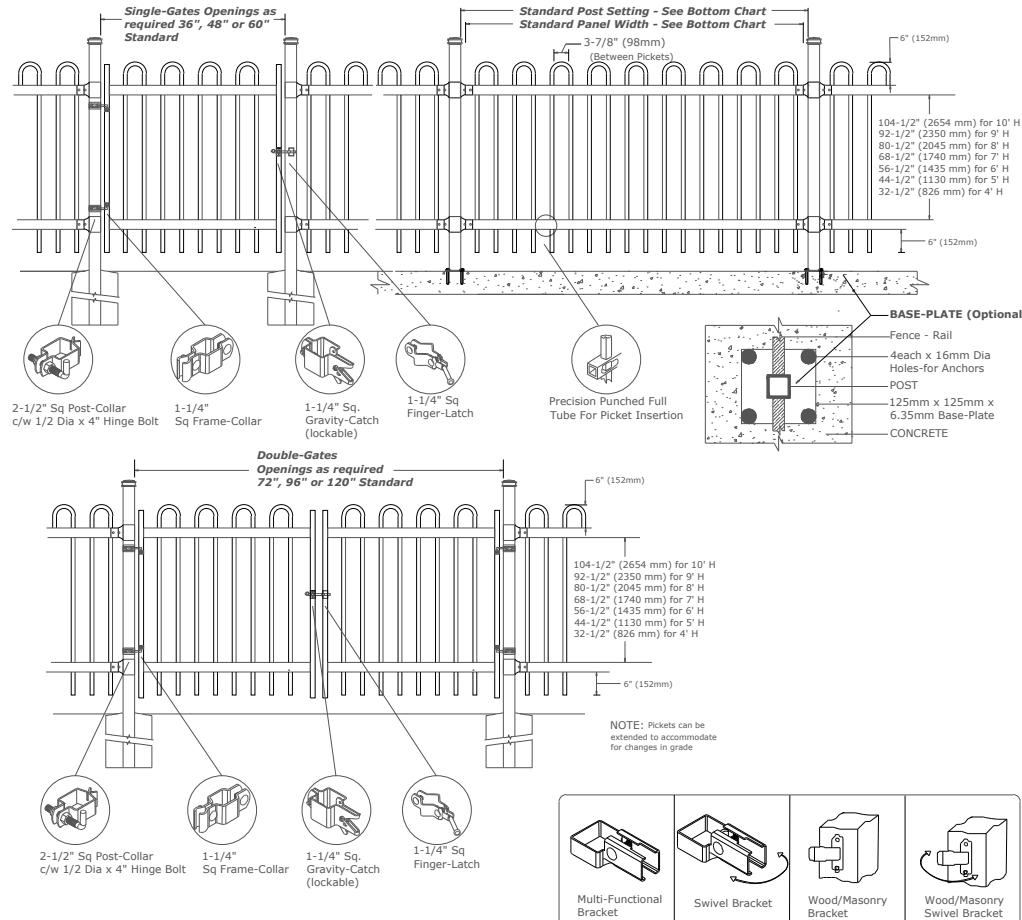

MATERIAL SPECIFICATIONS:

Alu-Tuff™
BY MEDALLION FENCE

Protected By



OPTIONAL POST CAPS



MATERIAL DIMENSIONS

PICKET	1" x 1" (25mm x 25mm) .080 Wall
RAILS	2-1/2" x 1-1/2" [64mm x 38mm] .125 Wall
POSTS	3" x 3" [76mm x 76mm] .188 Wall
OPTIONAL POST(1)	Larger profiles available - contact Medallion Fence
WELDS	Aluminum Mig Weld
FITTINGS	12 Gauge Stamp Forged Finish as below
FITTING FASTENERS	JS1000 Plated Finish as below
OPTIONAL FASTENER	Tamper Proof Nuts

FINISH

GRADE	Super Durable Polyester Powder Coat
OPTIONAL PRIMER	Zinc Rich Epoxy Powder Coat
OPTIONAL PRIMER (2)	E-Coat
STANDARD COLOUR	SEMI-GLOSS - BLACK
OTHER COLOURS	Green, Brown, White, Antique Silver
CUSTOM COLOURS	Per Specifications
STANDARD HEIGHT	4' 1219mm 5' 1524mm 6' 1892mm 7' 2134mm 8' 2438mm 9' 2743mm 10' 3048mm
	Custom heights are available (upon request)

STANDARD GATES Passage, Double Entry, Cantilever

STANDARD POST SETTING & PANEL WIDTH

FOR FENCE HEIGHTS	PANEL WIDTH	POST SPACING [OPENING]
Up to 6' [1829mm]	98" [2489mm]	101" [2565mm]
Over 6' [1829mm]	69" [1753mm]	71" [1803mm]