



Medallion Fence



10651 KEELE STREET
MAPLE, ONTARIO L6A 3Y9
(T) 905-832-2922 || 1-800-794-1564 || (F) 905-832-1564
info@medallionfence.com || www.medallionfence.com

Medallion Fence

STYLE:
CAMBRIDGE PET GUARD

SERIES:
FAIRMONT™

SINGLE-GATES OPENINGS
AS REQUIRED 42"
OR 56" STANDARD

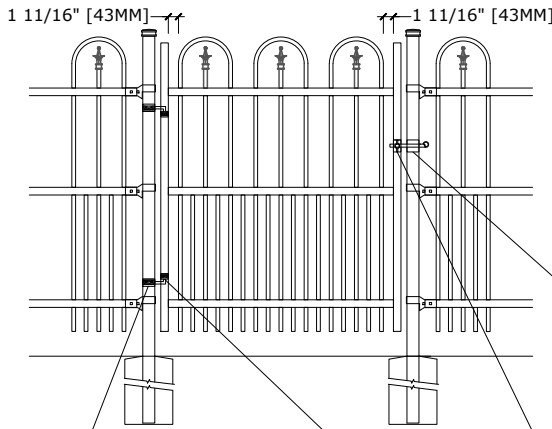

2" SQ POST-COLLAR
C/W 1/2 DIA X 4" HINGE BOLT



1-1/4"SQ
FRAME-COLLAR





1-1/4" SQ
FINGER-LATCH



2" SQ.
GRAVITY-CATCH
(LOCKABLE)

STANDARD POST SETTING - 90" [2286MM]
STANDARD PANEL WIDTH - 88" [2236MM]

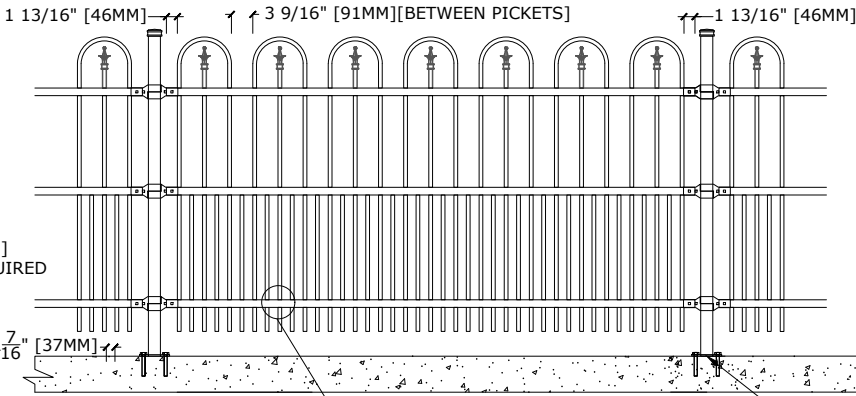


PRECISION PUNCHED FULL
TUBE FOR PICKET INSERTION

8 1/2" [216MM]
39 1/4" [997MM] FOR 72" H
26 1/4" [667MM] FOR 60" H
15 1/4" [388MM] FOR 48" H
9 1/4" [235MM] FOR 42" H
3 1/4" [83MM] FOR 36" H

17 7/16" [444MM]



4" [102MM]

BASE-PLATE (OPTIONAL)




FENCE -RAIL
4 EACH X 16 MM DIA
HOLES-FOR ANCHORS
POST
125MM X 125MM X
6.35MM BASE-PLATE
CONCRETE


DOUBLE-GATES OPENINGS AS
REQUIRED 84" OR 112" STANDARD

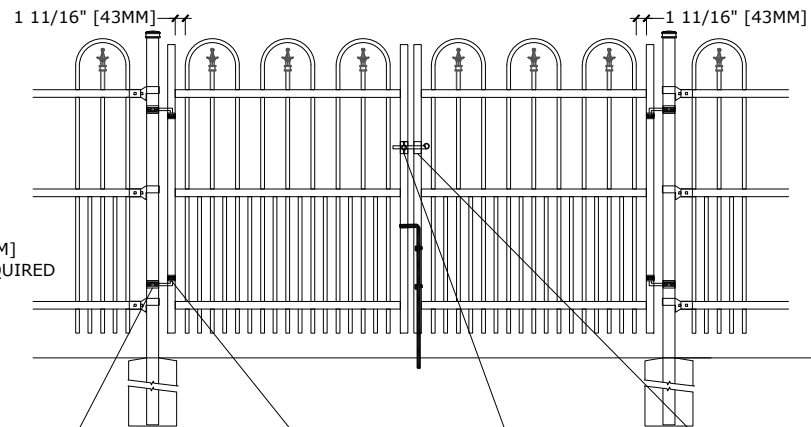


2" SQ POST-COLLAR
C/W 1/2 DIA X 4" HINGE BOLT



1-1/4"SQ
FRAME-COLLAR



1-1/4" SQ
FINGER-LATCH



2" SQ.
GRAVITY-CATCH
(LOCKABLE)


8 1/2" [216MM]

39 1/4" [997MM] FOR 72" H
26 1/4" [667MM] FOR 60" H
15 1/4" [388MM] FOR 48" H
9 1/4" [235MM] FOR 42" H
3 1/4" [83MM] FOR 36" H

17 7/16" [444MM]

4" [102MM]

OPTIONAL PICKET DESIGNS



MAPLE LEAF




ARROW




Spiral Finial (SF)

BRACKET



MULTI-FUNCTIONAL
BRACKET



WOOD/MASONRY BRACKET


OPTIONAL POST CAPS



PYRAMID




BALL




SPIRAL

SWIVEL BRACKET




SWIVEL BRACKET



WOOD/MASONRY SWIVEL
BRACKET

PROTECTED BY



ARMOUR-SHIELD™

MATERIAL SPECIFICATIONS:

ARMOUR-SHIELD™
BY MEDALLION FENCE

SPECIFICATIONS

TUBE COMPOSITION - POSTS , RAILS & PICKETS

- MINIMUM YIELD STRENGTH: 45 KSI (310 MPA)
- MINIMUM TENSILE STRENGTH: 55 KSI (380 MPA)
- ASTM A787 (TUBE)
- TUBE MANUFACTURED FROM PRE-COATED ALUMINUM-ZINC COATED STEEL WITH COATING DESIGNATION AZ50 CONFORMING TO ASTM A792/A792M

MATERIAL DIMENSIONS

PICKET	5/8" x 5/8" (16mm x 16mm) 18 GA
RAILS	1-1/4" x 1-1/4" (32mm x 32mm) 16 GA
POSTS REGULAR or BASE-PLATED	2" x 2" (51mm x 51mm) 16 GA or 14 GA
OPTIONAL POST REGULAR or BASE-PLATED	2-1/2" x 2-1/2" (64mmx64mm) 14 GA
UPRIGHTS	1-1/4" x 1-1/4" (32mm x 32mm) 16 GA or 14 GA

WELDS	Stainless Steel Mig Weld
FITTINGS	14 Gauge Stamp Forged Finish as below
FITTING FASTENERS	JS1000 Plated Finish as below
OPTIONAL FASTENER	Tamper Proof Nuts

FINISH

GRADE	Super Durable Polyester Powder Coat
OPTIONAL PRIMER	Zinc Rich Epoxy Powder Coat
OPTIONAL PRIMER (2)	E-Coat
STANDARD COLOUR	SEMI-GLOSS - BLACK
OTHER COLOURS	Green, Brown, White, Antique Silver
CUSTOM COLOURS	Per Specifications

STANDARD HEIGHTS	36" 914mm	42" 1067mm	48" 1219mm	60" 1524mm	72" 1892mm
	Custom heights are available for Panel & Pet Guard (upon request)				

STANDARD GATES	Passage, Double Entry, Cantilever
----------------	-----------------------------------

STANDARD POST SETTING & PANEL WIDTH

FOR FENCE HEIGHTS	PANEL WIDTH	POST SPACING [OPENING]
Up to 6' [1829mm]	88" [2235MM]	90" [2286 MM]
Over 6' [1829mm]	NA	